



NOTE: FULL PROJECT SCOPE IS SHOWN AT PLANS, ELEVATIONS AND DETAILS. WORK IS TO BE COMPLETED IN MULTIPLE PHASES. SEE SCHEMATIC PHASING DIAGRAM AT SHEET G001. COORDINATE FINAL DEMARCATION BETWEEN PHASES WITH TENANT REPRESENTATIVE AND ON-SITE CONDITIONS.




GENERAL PLAN NOTES

- SEE SHEET G001 FOR GRAPHIC LEGEND INFORMATION.
- SEE SHEET G002 FOR ADDITIONAL PLAN SPECIFIC GENERAL NOTES.
- SEE SHEET G010 FOR WALL AND CEILING DEVICE ALIGNMENT DIAGRAMS. PROVIDE ADDITIONAL CONCEALED FRAMING FOR EXACT PLACEMENT.
- SEE SHEET SERIES A75X FOR SCHEMATIC 3-DIMENSIONAL SPACE DEPICTIONS.
- SEE ALSO SEPARATELY ISSUED SOS INTERIOR SIGNAGE AND GRAPHICS* FOR ADDITIONAL INFORMATION AND FOR SCOPE NOT DESCRIBED AT THIS DOCUMENTATION SET.

KEYNOTE LEGEND

C102	FIVE ADJUSTABLE PLASTIC LAMINATE SHELVES ON HEAVY-DUTY SHELF STANDARDS, 8 FEET LONG. PROVIDE CONCEALED BLOCKING. SEE DETAIL 7/A805.
C103	AT ALL ALUMINUM AND GLASS ENTRY WALLS, SEE SEPARATE SIGNAGE VENDOR DRAWINGS FOR GRAPHIC FILM DISTRACTION MARKERS FOR FULL LENGTH OF SAFETY GLASS PANELS AND DOORS.
C105	AT ALL WALLS WITH WALL COVERING, PROVIDE LEVEL 5 FINISH, INCLUDING PRIMER AND PAINT. TO BE HAND TROWELLED AND SANDED LEVEL 5 FINISH TO ELIMINATE APPEARANCE AND SHADOWING OF METAL STUDS TELEGRAPHING TO PARTITION FACE. SPRAY APPLIED OR ROLLER-APPLIED LEVEL 5 COMPOUND WILL NOT BE ACCEPTED. COORDINATE WITH FINISH PLAN.
C106	FIRE EXTINGUISHER CABINETS TO BE FLUSH FACE DOOR. TYP. TO RECEIVE CUSTOM VINYL IDENTIFICATION GRAPHIC. SEE DETAIL AT SHEET 24012.
C107	PROVIDE CONCEALED BLOCKING FOR SUPPORT OF WALL MOUNTED MONITOR(S). PROVIDE ADDITIONAL FRAMING FOR EXACT PLACEMENT OF RECEPTACLES. RECEPTACLES AND CABLES TO BE CONCEALED FROM VIEW.
C108	CENTERLINE OF NEW PARTITION TO ALIGN WITH CENTERLINE OF EXISTING COLUMN OR EXTERIOR MULLION AS SHOWN. SEE TYPICAL PARTITION-TO-MULLION DETAIL A612.
C109	PROVIDE ADDITIONAL PARTITION CONSTRUCTION TO CLOSE GAP BETWEEN BACK FACE OF EXISTING COLUMN OR BUILD-OUT AND EXISTING PERIMETER GLAZING SYSTEM. TO YIELD ACOUSTICAL PRIVACY BETWEEN ADJACENT SPACES. SEE TYPICAL PARTITION-TO-MULLION DETAIL A612.
C113	PROVIDE HEAVY-GAUGE METAL STUD FRAMING ABOVE CEILING FOR SUPPORT OF PIVOT DOOR HARDWARE. LATERALLY BRACE. SEE DETAIL 7/A900.
C114	PROVIDE FLEXIBLE TUBE WATER CONNECTION WITH SEPARATE SHUT OFF FOR FREESTANDING COFFEE MAKER. COORDINATE FINAL LOCATION OF PENETRATION IN MILLWORK ON SITE WITH ARCHITECT.
C117	REFER TO SEPARATE SIGNAGE VENDOR DRAWINGS FOR NEW CUSTOM ADA-COMPLIANT IDENTIFICATION SIGNAGE AT TOILET ROOM(S). SIGNAGE TO INCORPORATE BRAILLE AND RAISED CHARACTERS PLUS UNIVERSAL PICTOGRAMS, ALL IN CONTRAST COLOR TO BACKGROUND.
C119	COORDINATE WITH ENGINEERING REQUIREMENTS FOR SCOPE NOT SHOWN AT THIS AREA.
C123	LOCATION OF TENANT PROVIDED DEFIBRILLATOR. COORDINATE MOUNTING LOCATION WITH ARCHITECT IN FIELD.
C124	REMOVE EXISTING GWB FROM TENANT SIDE OF EXISTING PARTITION (VERIFY FULL HEIGHT). PROVIDE NEW SAFR FULL HEIGHT OF WALL CAVITY. REMOVE EXISTING INSULATION IF PRESENT. PROVIDE HORIZONTAL RESILIENT CHANNELS FROM OFFICE 2462 TO EXTERIOR WALL AND FINISH WITH (2) LAYERS 5/8" GWB, FULL HEIGHT.
C125	AUGMENT THIS PORTION OF EXISTING WALL AT IDF AS REQUIRED TO ACHIEVE 1-HOUR FIRE RATED CONSTRUCTION.

Legend			
Description	Quantity	Unit	
✓ Count Measurement	11	Count	

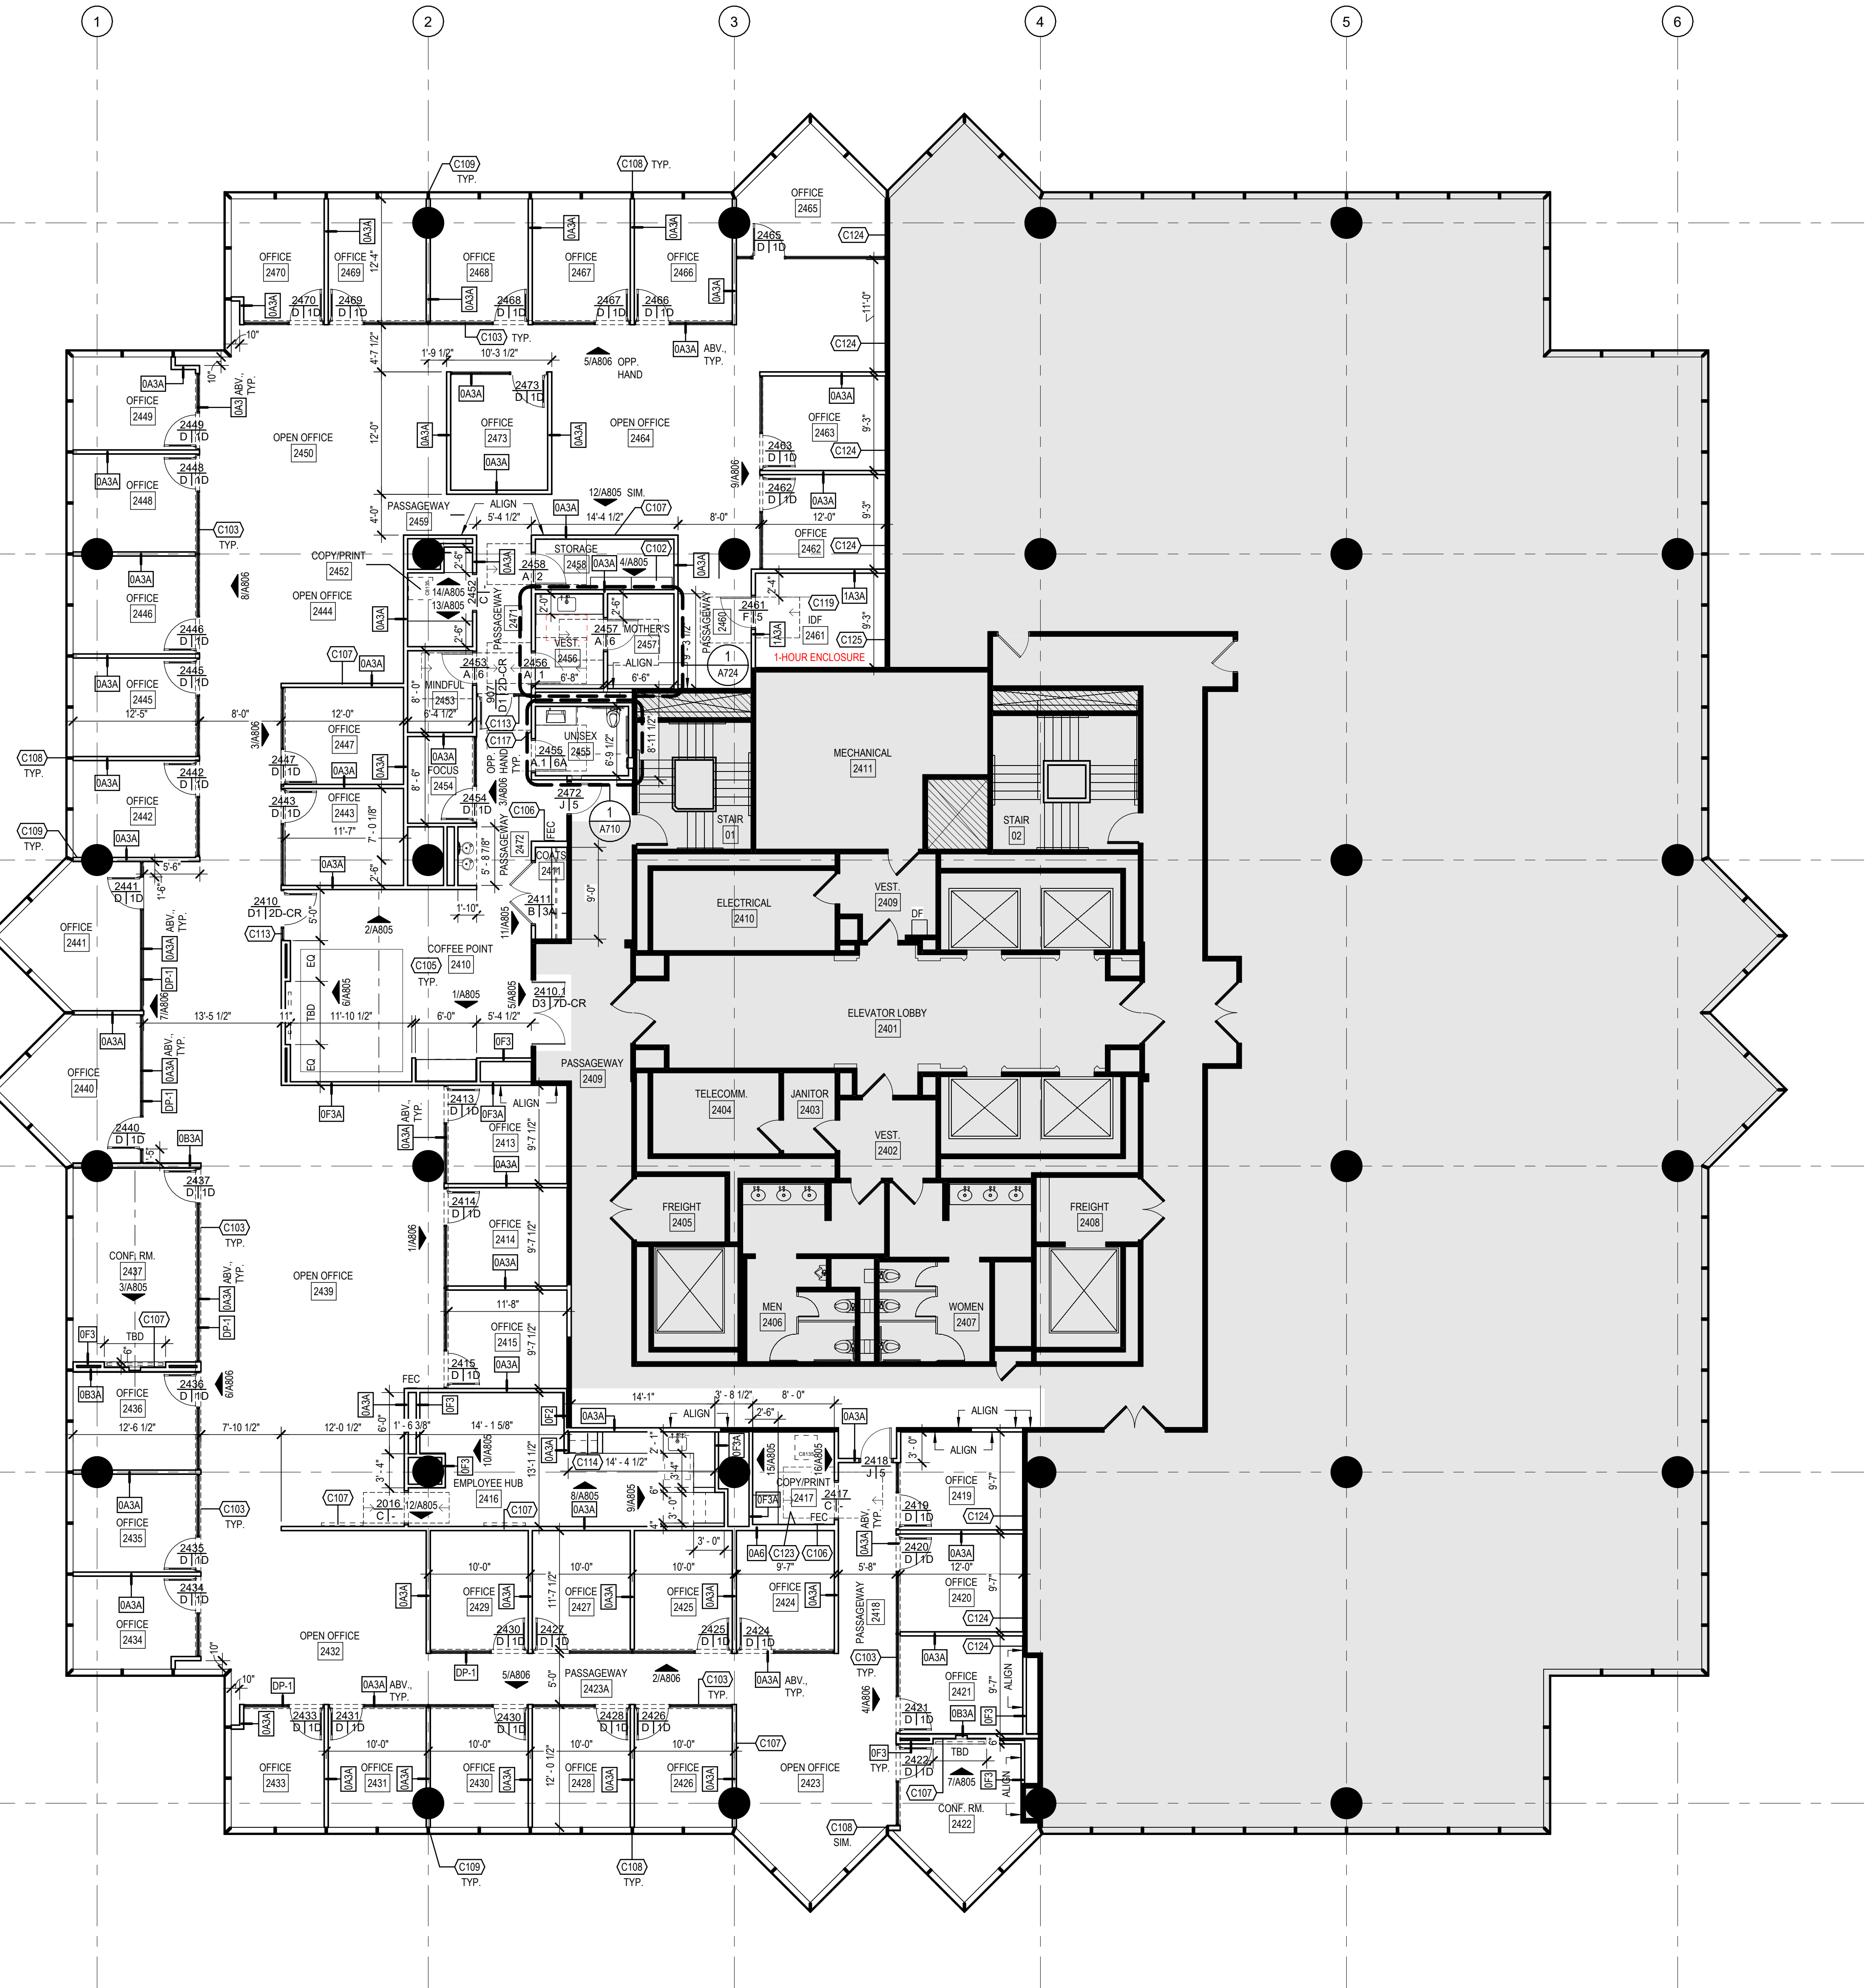

1 FLOOR PLAN - LEVEL 24
1/8" = 1'-0"