
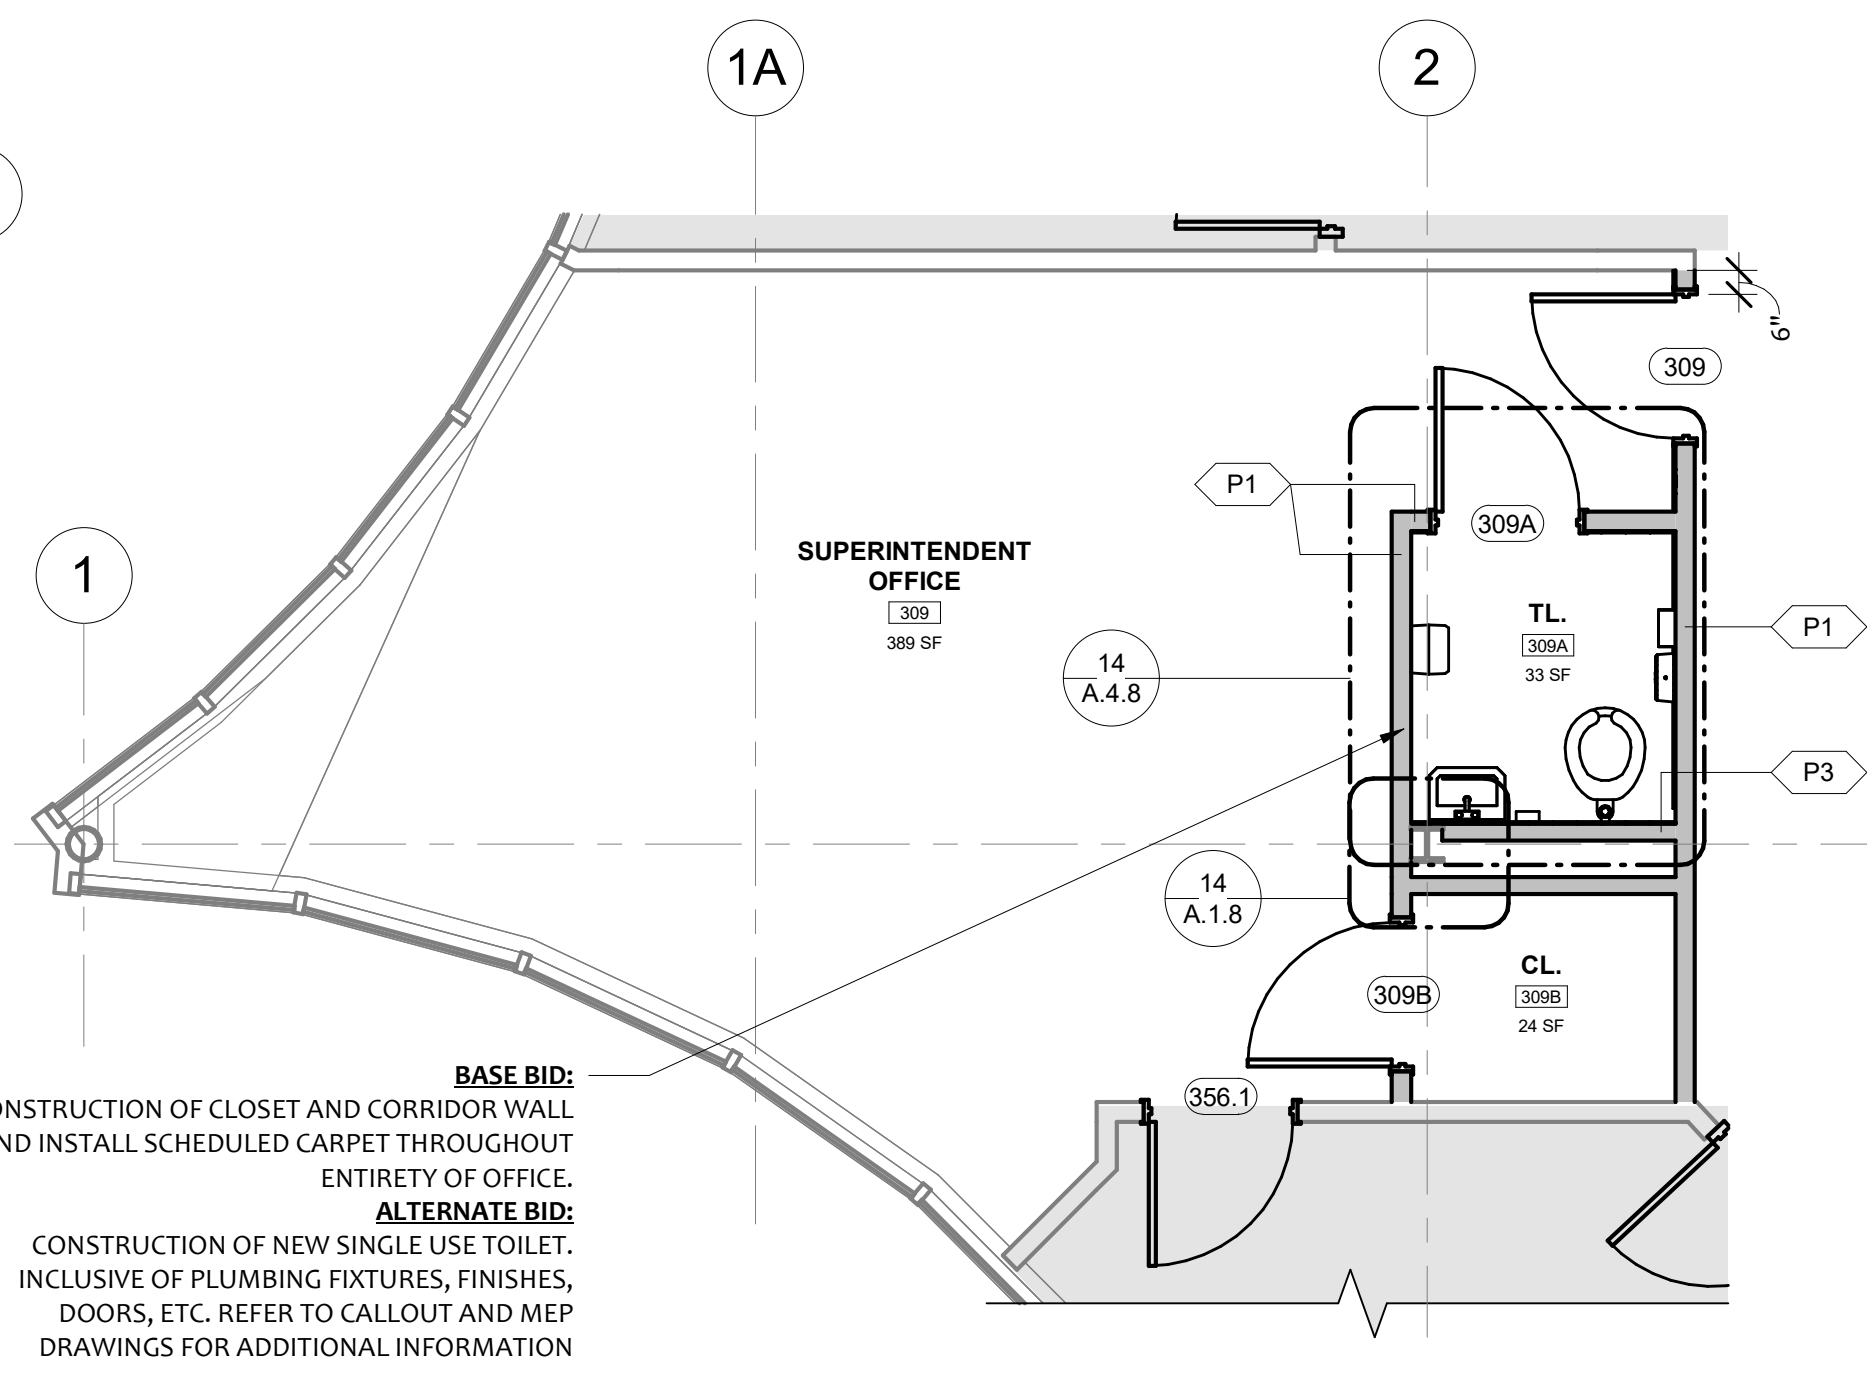


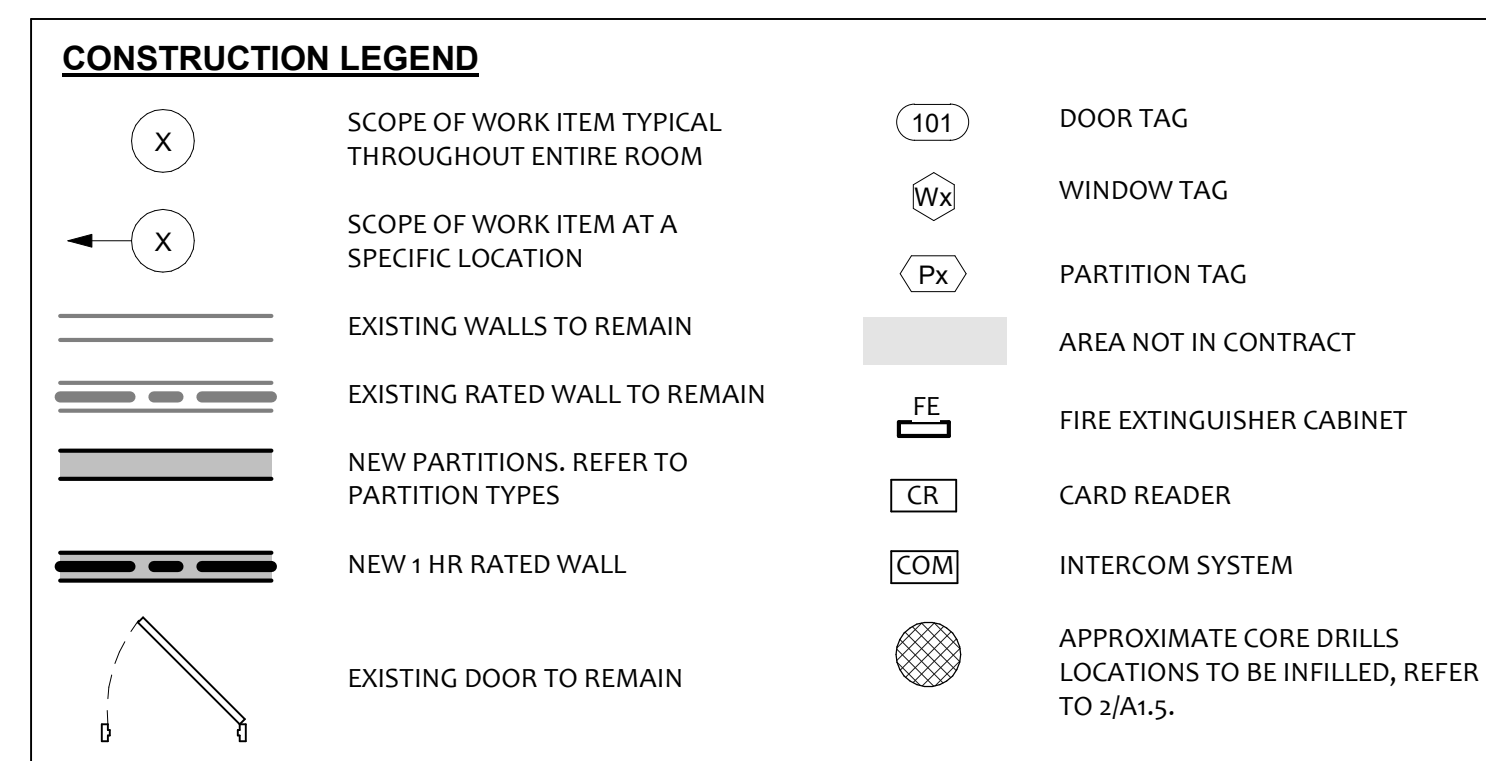

11. CONTRACTOR TO COORDINATE THE LOCATION OF POWER AND DATA FOR EACH ROOM WITH OWNER.
12. ALL WALLS, TRIM, AND CEILINGS TO BE SANDED WHERE NECESSARY, PATCHED, PRIMED, AND PAINTED. PAINT TO BE SELECTED BY OWNER IN ACCORDANCE WITH OWNERS' EXISTING STANDARDS.
13. REFER TO PLUMBING DRAWINGS FOR FIXTURE TYPES.
14. PATCH, PRIME, AND PREPARE FOR NEW FINISHES ALL SURFACES WHERE EXISTING WALLS, CABINETS, MECHANICAL EQUIPMENT, ETC. HAVE BEEN REMOVED.
15. CONTRACTOR SHALL PROVIDE AND INSTALL WOOD BLOCKING WITHIN ALL WALL ASSEMBLIES AT LOCATIONS DESIGNATED FOR CASEWORK, TOILET ACCESSORIES, VISUAL DISPLAY BOARDS, AND WALL MOUNTED EQUIPMENT AS REQUIRED.
16. ALL WALL PARTITIONS ARE TYPE P5 UNLESS NOTED/TAGGED OTHERWISE.
17. ALL DOORS THAT ARE ADJACENT TO A PERPENDICULAR WALL WILL HAVE THE HINGE SIDE OF THE DOOR OPENING 6" MINIMUM FROM THAT PERPENDICULAR WALL.
18. GC TO INSTALL A NEW SOLID SURFACE SILL ALONG THE INTERIOR BUILDING PERIMETER AT ALL GLAZING LOCATIONS THROUGHOUT THE ENTIRE FIRST AND SECOND FLOORS, AND AT THE INDICATED AREAS ON THE THIRD FLOOR. REFER TO THE FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
19. ALL EXISTING FLOOR CORE DRILLS THAT ARE NO LONGER REQUIRED SHALL BE INFILLED IN ACCORDANCE WITH DETAIL 2/A-1.5.
20. ALL ROUGH AND EXPOSED SURFACES FROM DEMOLISHED WALLS AND CEILING SHALL BE PATCHED AND FINISHED TO MATCH ADJACENT EXTERIOR SURFACE UNLESS OTHERWISE NOTED.
21. ALL EXPOSED UTILITY CONDUITS, PIPING, BRACING, ETC. SHALL BE CONCEALED WITHIN WALLS AND CEILINGS, UNLESS OTHERWISE NOTED. ALL SCHEDULED UTILITY LINES NOT ABLE TO BE CONCEALED DUE TO EXISTING CONDITIONS SHALL BE COVERED WITH WIREMOLD, RACEWAYS, OR PAINTED METAL BOX ENCLOSURE AS REQUIRED, TYPICAL THROUGHOUT PROJECT.

NEW WORK PLAN - THIRD FLOOR

No.	DATE:	COMMENTS:
	3/10/2026	ISSUE FOR BID

DATE:	SOLUTION No.
3/10/2026	
SCALE:	25.138E
As indicated	
DRAWN BY:	DRAWING No.
SW, TB	
CHECKED BY:	A.1.6
VO	