


C:\Users\Sharon\Documents\2025-2026\31-Central Building Alteration - 2026.cdw-26 - Sharon.dwg 3/10/2025 3:54:49 PM

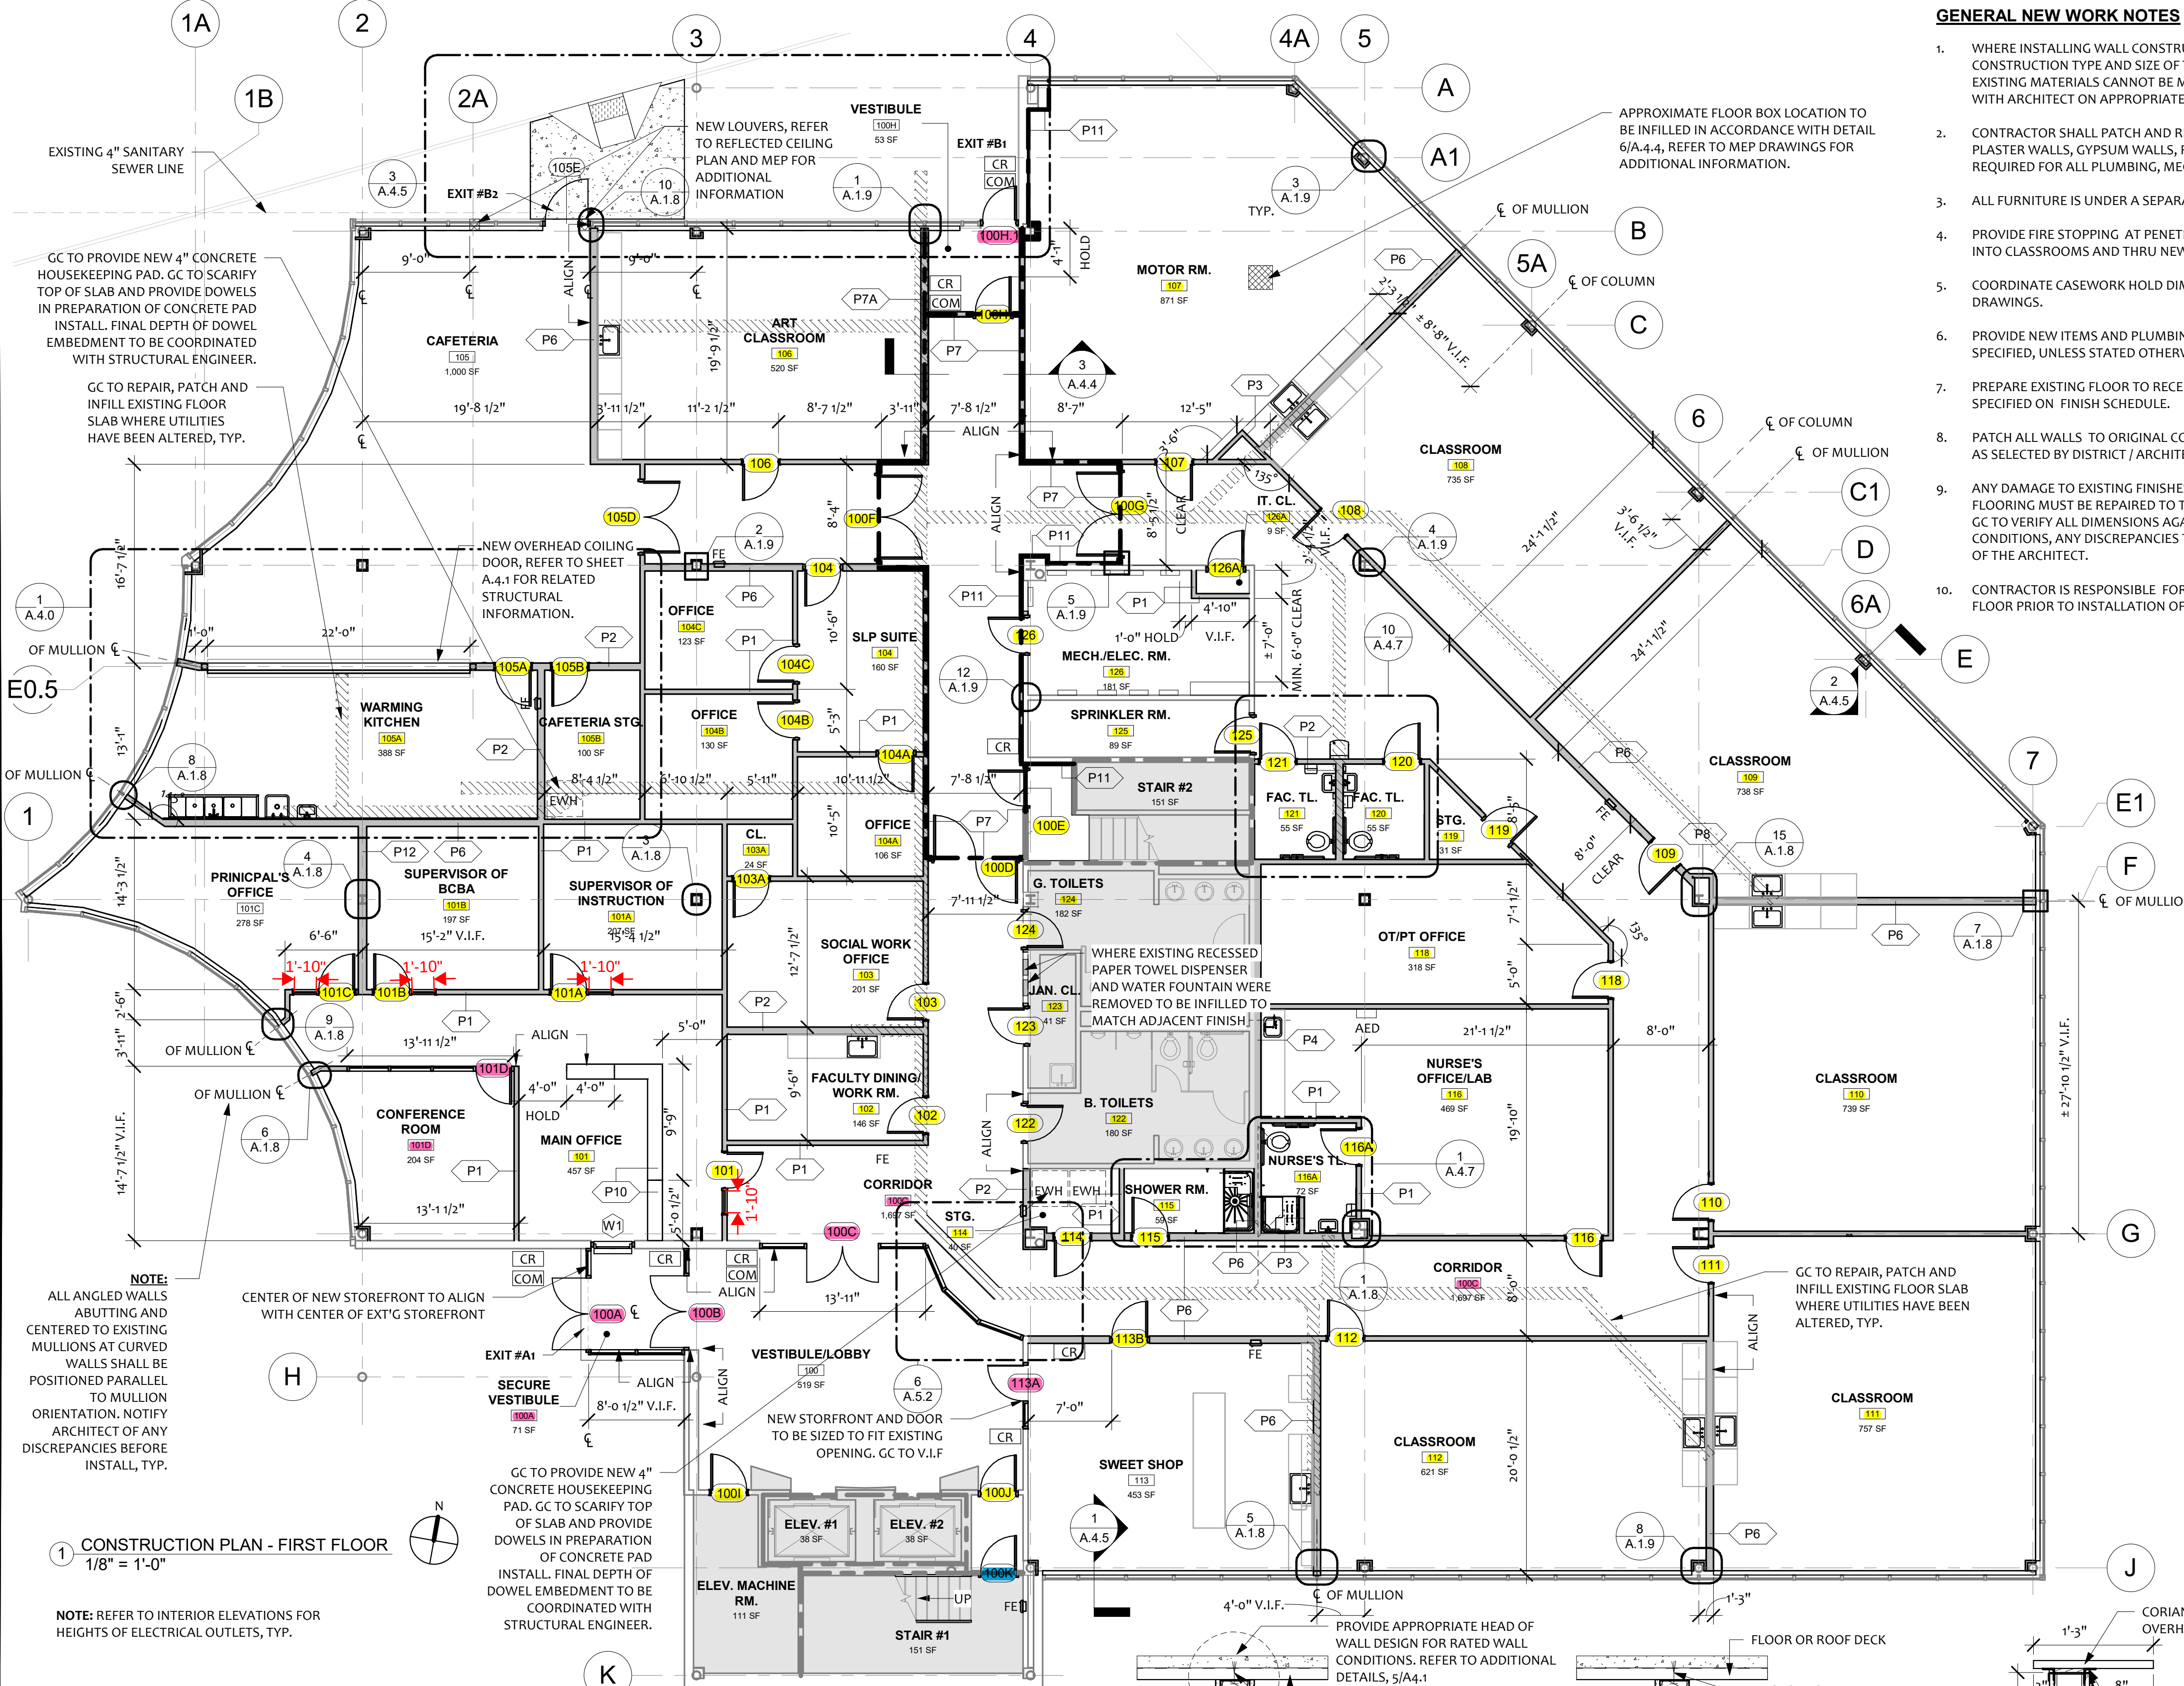

1 CONSTRUCTION PLAN - FIRST FLOOR
1/8" = 1'-0"

NOTE: REFER TO INTERIOR ELEVATIONS FOR HEIGHTS OF ELECTRICAL OUTLETS, TYP.

CONSTRUCTION LEGEND

	SCOPE OF WORK ITEM TYPICAL THROUGHOUT ENTIRE ROOM		DOOR TAG
	SCOPE OF WORK ITEM AT A SPECIFIC LOCATION		WINDOW TAG
	EXISTING WALLS TO REMAIN		PARTITION TAG
	EXISTING RATED WALL TO REMAIN		AREA NOT IN CONTRACT
	NEW PARTITIONS. REFER TO PARTITION TYPES		FIRE EXTINGUISHER CABINET
	NEW 1 HR RATED WALL		CARD READER
	EXISTING DOOR TO REMAIN		INTERCOM SYSTEM
			APPROXIMATE CORE DRILLS LOCATIONS TO BE INFILLED, REFER TO 2/A1.5.


WALL PARTITIONS
1" = 1'-0"

GENERAL NEW WORK NOTES


- WHERE INSTALLING WALL CONSTRUCTION, MATCH EXISTING CONSTRUCTION TYPE AND SIZE OF THE ADJACENT CONSTRUCTION, IF EXISTING MATERIALS CANNOT BE MATCHED COMPLETELY, COORDINATE WITH ARCHITECT ON APPROPRIATE ACTION.
- CONTRACTOR SHALL PATCH AND REPAIR EXISTING MASONRY WALLS, PLASTER WALLS, GYPSUM WALLS, FLOORING AND CEILINGS AS REQUIRED FOR ALL PLUMBING, MECHANICAL AND ELECTRICAL WORK.
- ALL FURNITURE IS UNDER A SEPARATE CONTRACT.
- PROVIDE FIRE STOPPING AT PENETRATIONS FROM CORRIDOR WALL INTO CLASSROOMS AND THRU NEW FIRE SEPARATION WALL.
- COORDINATE CASEWORK HOLD DIMENSIONS WITH CASEWORK SHOP DRAWINGS.
- PROVIDE NEW ITEMS AND PLUMBING FIXTURES AS SHOWN AND SPECIFIED, UNLESS STATED OTHERWISE.
- PREPARE EXISTING FLOOR TO RECEIVE NEW FLOOR FINISHES AS SPECIFIED ON FINISH SCHEDULE.
- PATCH ALL WALLS TO ORIGINAL CONDITION. PROVIDE NEW WALL PAINT AS SELECTED BY DISTRICT / ARCHITECT.
- ANY DAMAGE TO EXISTING FINISHES, INCLUDING CEILINGS, WALLS, OR FLOORING MUST BE REPAIRED TO THEIR ORIGINAL CONDITION. GC TO VERIFY ALL DIMENSIONS AGAINST EXISTING BUILDING CONDITIONS, ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.
- CONTRACTOR IS RESPONSIBLE FOR FLASH PATCHING/ LEVELING OF FLOOR PRIOR TO INSTALLATION OF NEW FINISH FLOORING.
- CONTRACTOR TO COORDINATE THE LOCATION OF POWER AND DATA FOR EACH ROOM WITH OWNER.
- ALL WALLS, TRIM, AND CEILINGS TO BE SANDED WHERE NECESSARY, PATCHED, PRIMED, AND PAINTED. PAINT TO BE SELECTED BY OWNER IN ACCORDANCE WITH OWNERS' EXISTING STANDARDS.
- REFER TO PLUMBING DRAWINGS FOR FIXTURE TYPES.
- PATCH, PRIME, AND PREPARE FOR NEW FINISHES ALL SURFACES WHERE EXISTING WALLS, CABINETS, MECHANICAL EQUIPMENT, ETC. HAVE BEEN REMOVED.
- CONTRACTOR SHALL PROVIDE AND INSTALL WOOD BLOCKING WITHIN ALL WALL ASSEMBLIES AT LOCATIONS DESIGNATED FOR CASEWORK, TOILET ACCESSORIES, VISUAL DISPLAY BOARDS, AND WALL MOUNTED EQUIPMENT AS REQUIRED.
- ALL WALL PARTITIONS ARE TYPE P5 UNLESS NOTED/TAGGED OTHERWISE.
- ALL DOORS THAT ARE ADJACENT TO A PERPENDICULAR WALL WILL HAVE THE HINGE SIDE OF THE DOOR OPENING 6" MINIMUM FROM THAT PERPENDICULAR WALL.
- GC TO INSTALL A NEW SOLID SURFACE SILL ALONG THE INTERIOR BUILDING PERIMETER AT ALL GLAZING LOCATIONS THROUGHOUT THE ENTIRE FIRST AND SECOND FLOORS, AND AT THE INDICATED AREAS ON THE THIRD FLOOR. REFER TO THE FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
- ALL EXISTING FLOOR CORE DRILLS THAT ARE NO LONGER REQUIRED SHALL BE INFILLED IN ACCORDANCE WITH DETAIL 2/A1.5.
- ALL ROUGH AND EXPOSED SURFACES FROM DEMOLISHED WALLS AND CEILING SHALL BE PATCHED AND FINISHED TO MATCH ADJACENT EXTERIOR SURFACE UNLESS OTHERWISE NOTED.
- ALL EXPOSED UTILITY CONDUITS, PIPING, BRACING, ETC. SHALL BE CONCEALED WITHIN WALLS AND CEILINGS, UNLESS OTHERWISE NOTES. ALL SCHEDULED UTILITY LINES NOT ABLE TO BE CONCEALED DUE TO EXISTING CONDITIONS SHALL BE COVERED WITH WIREMOLD, RACEWAYS, OR PAINTED METAL BOX ENCLOSURE AS REQUIRED, TYPICAL THROUGHOUT PROJECT.

GENERAL PARTITION NOTE:

- PROVIDE SLIP-TRACK AT ALL METAL STUDS ABUTTING TO DECK ABOVE.
- RUN ALL SOUND BATTS TO DECK ABOVE. PROVIDE INSULATION SUPPORTS AS REQUIRED. USE CEMENT BOARD SUBSTRATE AT ALL TILED FINISH AT SHOWER ROOMS AND WET AREAS.
- ALL STUD SPACING NOTED IN DRAWINGS IS THE MINIMUM REQUIREMENT. GC TO ENSURE STUDS ARE SPACED APPROPRIATELY FOR PROPER STURDY INSTALL OF GYP. BOARD AND OTHER NOTED SUBSTRATES AS INTENDED DESIGN, TYPICAL THROUGHOUT PROJECT.

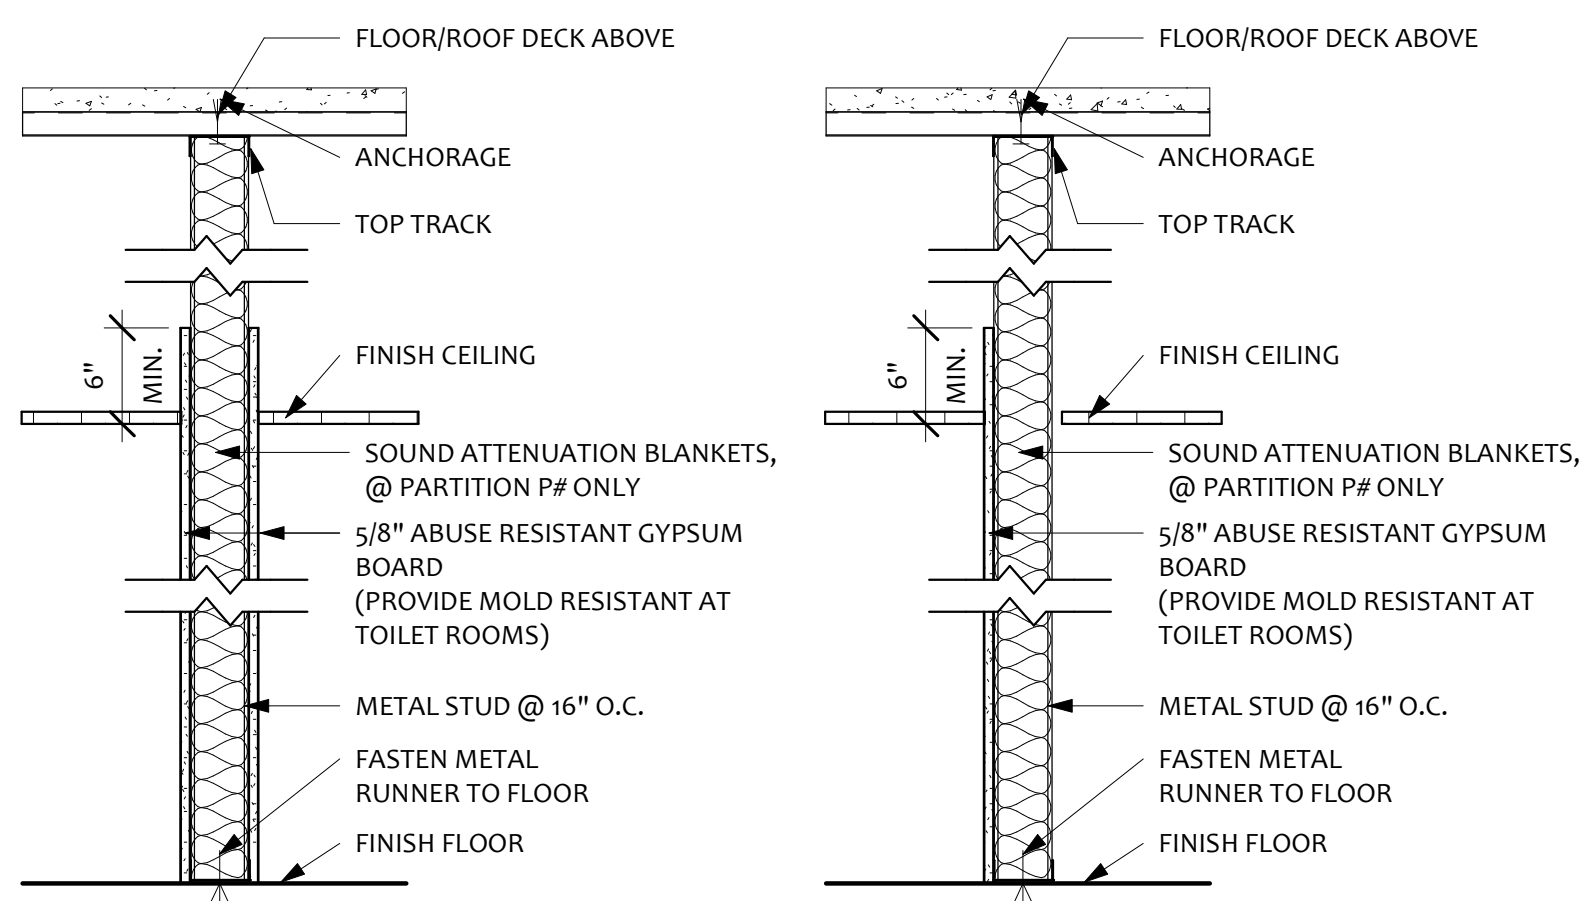

- P1 3 5/8" STUD & GYPSUM BOARD PARTITION
P2 6" STUD & GYPSUM BOARD PARTITION
P3 3 5/8" STUD & ONE SIDE GYPSUM BOARD PARTITION
P4 6" STUD & ONE SIDE GYPSUM BOARD PARTITION

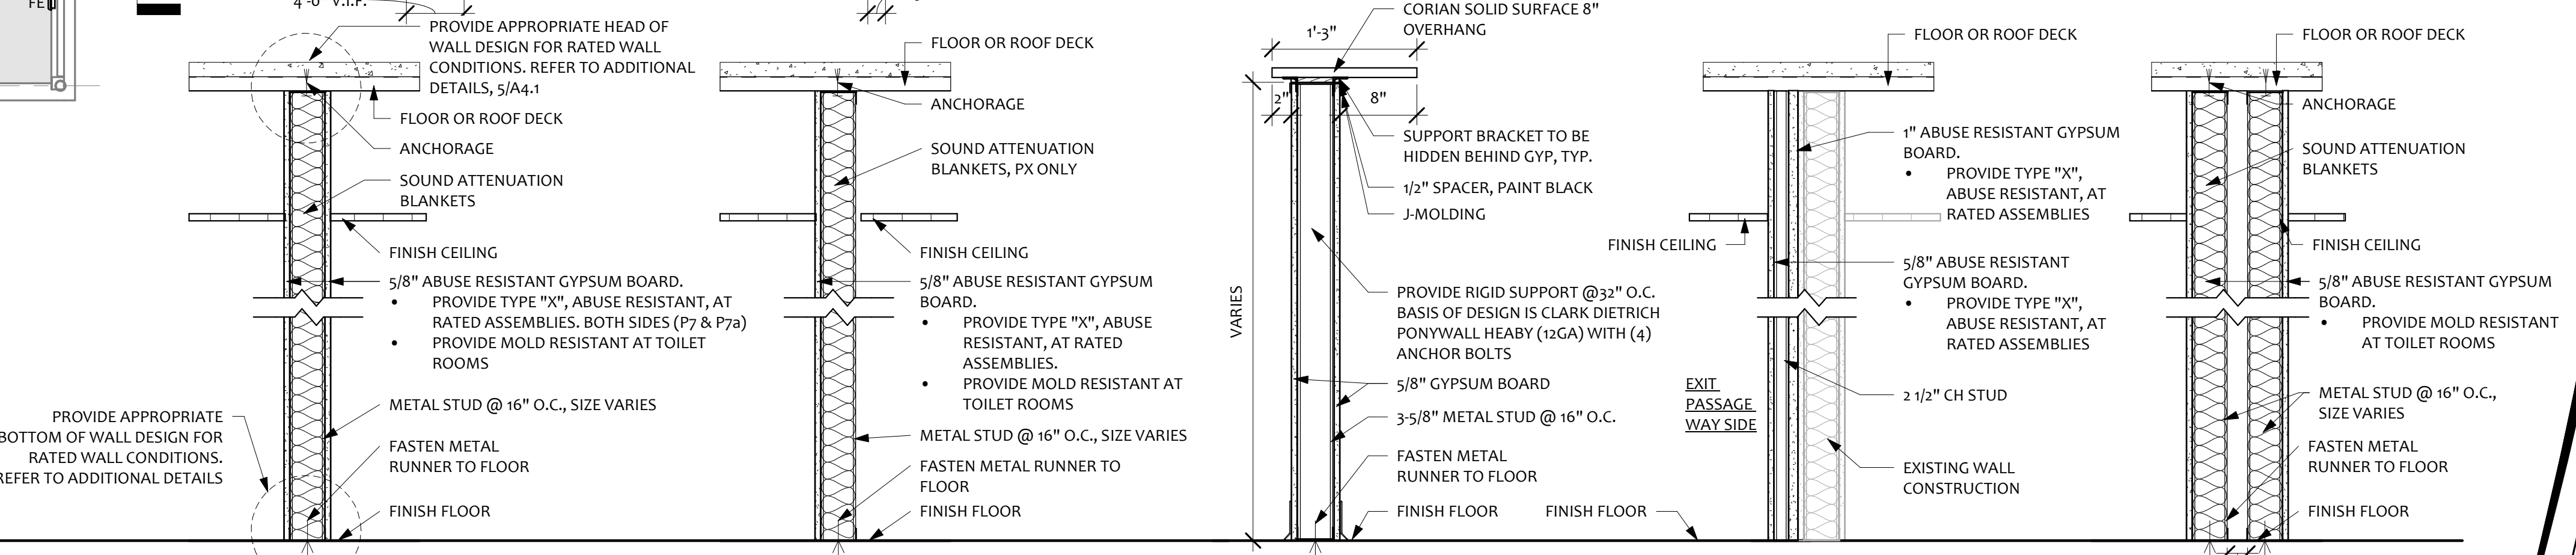

- P5 3 5/8" STUD & GYPSUM BOARD PARTITION
P6 6" STUD & GYPSUM BOARD PARTITION
P7 3 5/8" STUD & GYPSUM BOARD PARTITION. 1 HOUR RATED, UL No. U465
P7A 6" STUD & GYPSUM BOARD PARTITION. 1 HOUR RATED, UL No. U465
P8 3 5/8" STUD & ONE SIDE GYPSUM BOARD PARTITION
P9 6" STUD & ONE SIDE GYPSUM BOARD PARTITION
P10 GYPSUM BOARD LOW PARTITION W/ COUNTER
P11 CH SHAFT WALL ASSEMBLY. 1 HOUR RATED, UL No. U465 & ICC-ES LISTING REPORT ESI-1192
P12 (2) 3 5/8" STUD & 5/8" GYPSUM BOARD PARTITION

SOLUTIONS
ARCHITECTURE

FRANK A. MESSINEO, AIA • A114580

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED BY THE ARCHITECT
This document and all other documents herein are the property and copyright of SOLUTIONS ARCHITECTURE. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the express written consent of the Architect.
96 Piquette Avenue, 2nd Floor, Suite 200, Warren, NJ 07064
www.solutionsarch.com
Architect's Seal:

INTERIOR ALTERATIONS
FOR
UNION COUNTY EDUCATIONAL SERVICES
COMMISSION
AT
WESTLAKE / UCESC BOE
53 CARDINAL DR., WESTFIELD, NEW JERSEY 07090

Consulting Engineer's Seal:


NEW WORK PLAN - FIRST FLOOR

No. DATE: 3/10/2026	COMMENTS: ISSUE FOR BID
DATE: 3/10/2026	SOLUTION No. 25.138B
SCALE: As indicated	
DRAWN BY: SW, TB	DRAWING No. A.1.4
CHECKED BY: YO	

SEALANT AS SPECIFIED BY MANUF

- | | |
|------------------------|----------------|
| DATE:
3/10/2026 | SOLUTION No. |
| SCALE:
As indicated | 25.138E |
| DRAWN BY:
SW, TB | DRAWING No. |
| CHECKED BY:
VO | A.1.5 |

53 CARDINAL DR., WESTFIELD, NEW JERSEY 07090

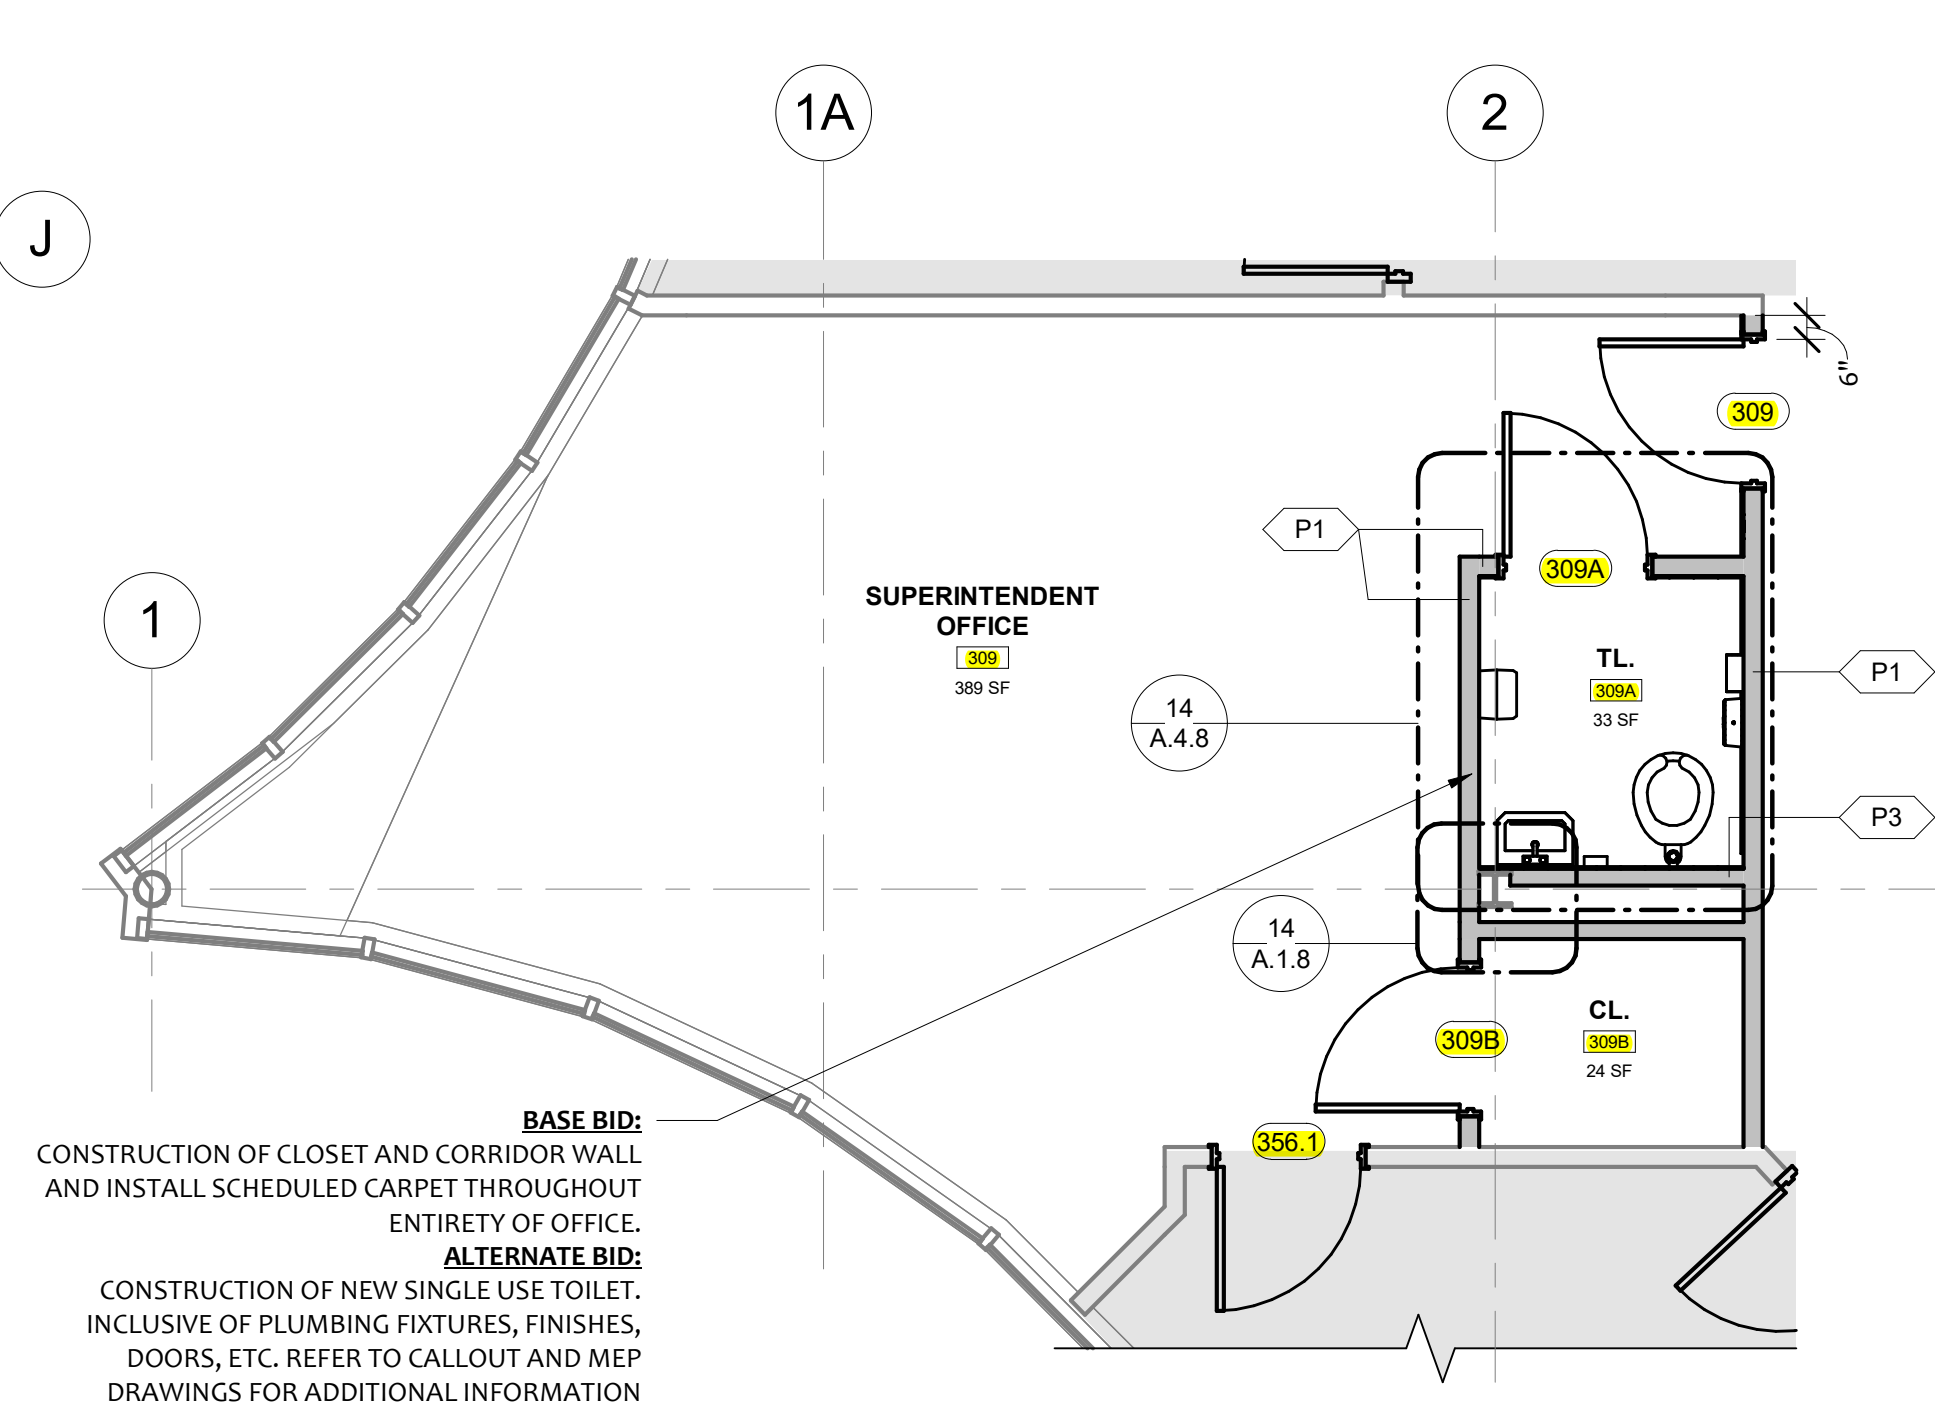

- CONTRACTOR TO COORDINATE THE LOCATION OF POWER AND DATA FOR EACH ROOM WITH OWNER.
- ALL WALLS, TRIM, AND CEILINGS TO BE SANDED WHERE NECESSARY, PATCHED, PRIMED, AND PAINTED. PAINT TO BE SELECTED BY OWNER IN ACCORDANCE WITH OWNERS' EXISTING STANDARDS.
- REFER TO PLUMBING DRAWINGS FOR FIXTURE TYPES.
- PATCH, PRIME, AND PREPARE FOR NEW FINISHES ALL SURFACES WHERE EXISTING WALLS, CABINETS, MECHANICAL EQUIPMENT, ETC. HAVE BEEN REMOVED.
- CONTRACTOR SHALL PROVIDE AND INSTALL WOOD BLOCKING WITHIN ALL WALL ASSEMBLIES AT LOCATIONS DESIGNATED FOR CASEWORK, TOILET ACCESSORIES, VISUAL DISPLAY BOARDS, AND WALL MOUNTED EQUIPMENT AS REQUIRED.
- ALL WALL PARTITIONS ARE TYPE P5 UNLESS NOTED/TAGGED OTHERWISE.
- ALL DOORS THAT ARE ADJACENT TO A PERPENDICULAR WALL WILL HAVE THE HINGE SIDE OF THE DOOR OPENING 6" MINIMUM FROM THAT PERPENDICULAR WALL.
- QC TO INSTALL A NEW SOLID SURFACE SILL ALONG THE INTERIOR BUILDING PERIMETER AT ALL GLAZING LOCATIONS THROUGHOUT THE ENTIRE FIRST AND SECOND FLOORS, AND AT THE INDICATED AREAS ON THE THIRD FLOOR. REFER TO THE FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
- ALL EXISTING FLOOR CORE DRILLS THAT ARE NO LONGER REQUIRED SHALL BE INFILLED IN ACCORDANCE WITH DETAIL 2/A-1.5.
- ALL ROUGH AND EXPOSED SURFACES FROM DEMOLISHED WALLS AND CEILING SHALL BE PATCHED AND FINISHED TO MATCH ADJACENT EXTERIOR SURFACE UNLESS OTHERWISE NOTED.
- ALL EXPOSED UTILITY CONDUITS, PIPING, BRACING, ETC. SHALL BE CONCEALED WITHIN WALLS AND CEILINGS, UNLESS OTHERWISE NOTED. ALL SCHEDULED UTILITY LINES NOT ABLE TO BE CONCEALED DUE TO EXISTING CONDITIONS SHALL BE COVERED WITH WIREMOLD, RACEWAYS, OR PAINTED METAL BOX ENCLOSURE AS REQUIRED, TYPICAL THROUGHOUT PROJECT.

	SCOPE OF WORK ITEM TYPICAL THROUGHOUT ENTIRE ROOM		DOOR TAG
	SCOPE OF WORK ITEM AT A SPECIFIC LOCATION		WINDOW TAG
	EXISTING WALLS TO REMAIN		PARTITION TAG
	EXISTING RATED WALL TO REMAIN		AREA NOT IN CONTRACT
	NEW PARTITIONS. REFER TO PARTITION TYPES		FIRE EXTINGUISHER CABINET
	NEW 1 HR RATED WALL		CARD READER
			INTERCOM SYSTEM
	EXISTING DOOR TO REMAIN		APPROXIMATE CORE DRILLS LOCATIONS TO BE INFILLED, REFER TO 2/A1-5.

③ ALTERNATE BID - ENLARGED PLAN - THIRD FLOOR SUPERINTENDENT OFFICE
1/4" = 1'-0"

No.	DATE:	COMMENTS:
	3/10/2026	ISSUE FOR BID

DATE:	SOLUTION No.
3/10/2026	25.138B
SCALE:	
As indicated	
DRAWN BY:	DRAWING No.
SW, TB	A.1.6
CHECKED BY:	
VO	