

ELEC SYMBOLS & DEVICES LEGE...

SYMBOL	DESCRIPTION	Model
	BADGE READER	BUILDING STANDARD
	DUPLEX WALL RECEPTACLE	BUILDING STANDARD
	DUPLEX WALL RECEPTACLE ON DEDICATED CIRCUIT	BUILDING STANDARD
	DUPLEX WALL RECEPTACLE WITH GROUND FAULT CIRCUIT INTERRUPT (GFCI)	BUILDING STANDARD
	FLUSH MOUNTED FLOOR POKE-THROUGH FOR POWER AND DATA	BUILDING STANDARD
	REQUEST TO EXIT SENSOR/BUTTON	BUILDING STANDARD

NOTE:

1. FOR ALL WALL MOUNTED DEVICES, ON CENTER MOUNTING HEIGHT SHALL BE 18" O.C. UNLESS NOTED OTHERWISE ON PLAN. NUMBER ADJACENT END OF DEVICE INDICATES NON-STANDARD MOUNTING HEIGHT IN INCHES A.F.F.

2. ALL ELECTRICAL DEVICES NEW UNLESS NOTED AS "EX" (EXISTING). SEE DEMO PLAN FOR DEVICES TO BE REMOVED.

PLUMBING FIXTURE SCHEDULE

MARK	DESCRIPTION	MFR	MODEL
S1	UNDERMOUNT BAR SINK	ELKAY	ELUHAD12155PD
T1	TENANT STANDARD BAR FAUCET	ELKAY	LK800GN05T4




SYMBOLS AND DEVICES PLAN GENERAL NOTES

- ALL RECEPTACLES ABOVE 34" HIGH COUNTERS TO BE 44" A.F.F. U.N.O.
- SURVEY EXISTING DOORS, FRAMES AND HARDWARE. PROVIDE NEW ONLY IF EXISTING DOORS ARE NOT SUITABLE FOR REUSE. ALL EXISTING REUSED ITEMS SHALL BE CLEANED/RESTORED FOR BEST POSSIBLE APPEARANCE.
- PROVIDE A TRANSACTION COUNTERTOP PER ADA REQUIREMENTS. SEE INTERIOR ELEVATIONS
- PROVIDE/REUSE EXISTING PLUMBING FIXTURES AS SPECIFIED.
- SURVEY EXISTING CONDITIONS TO LOCATE THE ELECTRICAL PANEL TO REMAIN AND ACCOMMODATE NEW CONNECTIONS.
- PROVIDE/REUSE EXISTING EMERGENCY NOTIFICATION DEVICES, BADGE READERS, SENSOR/PUSH EXIT BUTTON, AND OTHER SECURITY DEVICES AS SHOWN IN THE PLAN.
- PROVIDE/VERIFY EXISTING FIRE EXTINGUISHERS AS REQUIRED; REFER TO SPECIFICATIONS FOR ADDITIONAL DETAILS.
- PROVIDE MILLWORK PER INTERIOR ELEVATIONS AND DETAILS.
- INSTALL NEW OR RELOCATED THERMOSTATS AS NEEDED, PER ENGINEERING DRAWINGS.
- PROVIDE WATER LINES FOR THE TENANT'S REFRIGERATOR ICEMAKER (WITH RECESSED WALL BOX) AND COFFEE MAKER.
- REFRIGERATOR(S) TO BE ON DEDICATED CIRCUIT
- CONTRACTOR SHALL INSTALL EXISTING RELOCATED/NEW APPLIANCES.

SYMBOLS AND DEVICES NOTES LEGEND

Type	Description
SDP 1	PROVIDE NEW GWB ON EXISTING METAL STUDS (WALLS AND CEILINGS). AT PAIRS OF PILASTERS, INFILL STUD FRAMING TO REMOVE GAP BETWEEN EXISTING PILASTERS.
SDP 2	PROVIDE 5-HIGH 18" DEEP SHELVING IN CLOSET - REFER TO SPECIFICATIONS AND DETAILS FOR ADDITIONAL INFORMATION.
SDP 3	PROVIDE "PIEDMONT PLUGS" AT MULLIONS INDICATED. SEAL ALL GAPS BETWEEN ADJACENT ROOMS.
SDP 4	DASHED LINE INSIDE PARTITION INDICATES EXISTING PARTITION TO BE FILLED WITH BLOWN-IN ACOUSTIC INSULATION.
SDP 5	PROVIDE NEW TEMPERED GLASS SIDELITE IN PAINTED HOLLOW METAL FRAME TO MATCH EXISTING AT ADJACENT OFFICES.

INTERIOR PARTITION TYPES LEGEND

	EXISTING PARTITION - TO REMAIN
	EXISTING 1-HOUR RATED PARTITION - TO REMAIN - PROTECT ALL OPENINGS
	NEW PARTITION - SEE PARTITION LEGEND FOR SPECIFIC TYPES
	EXISTING CONSTRUCTION - TO BE REMOVED

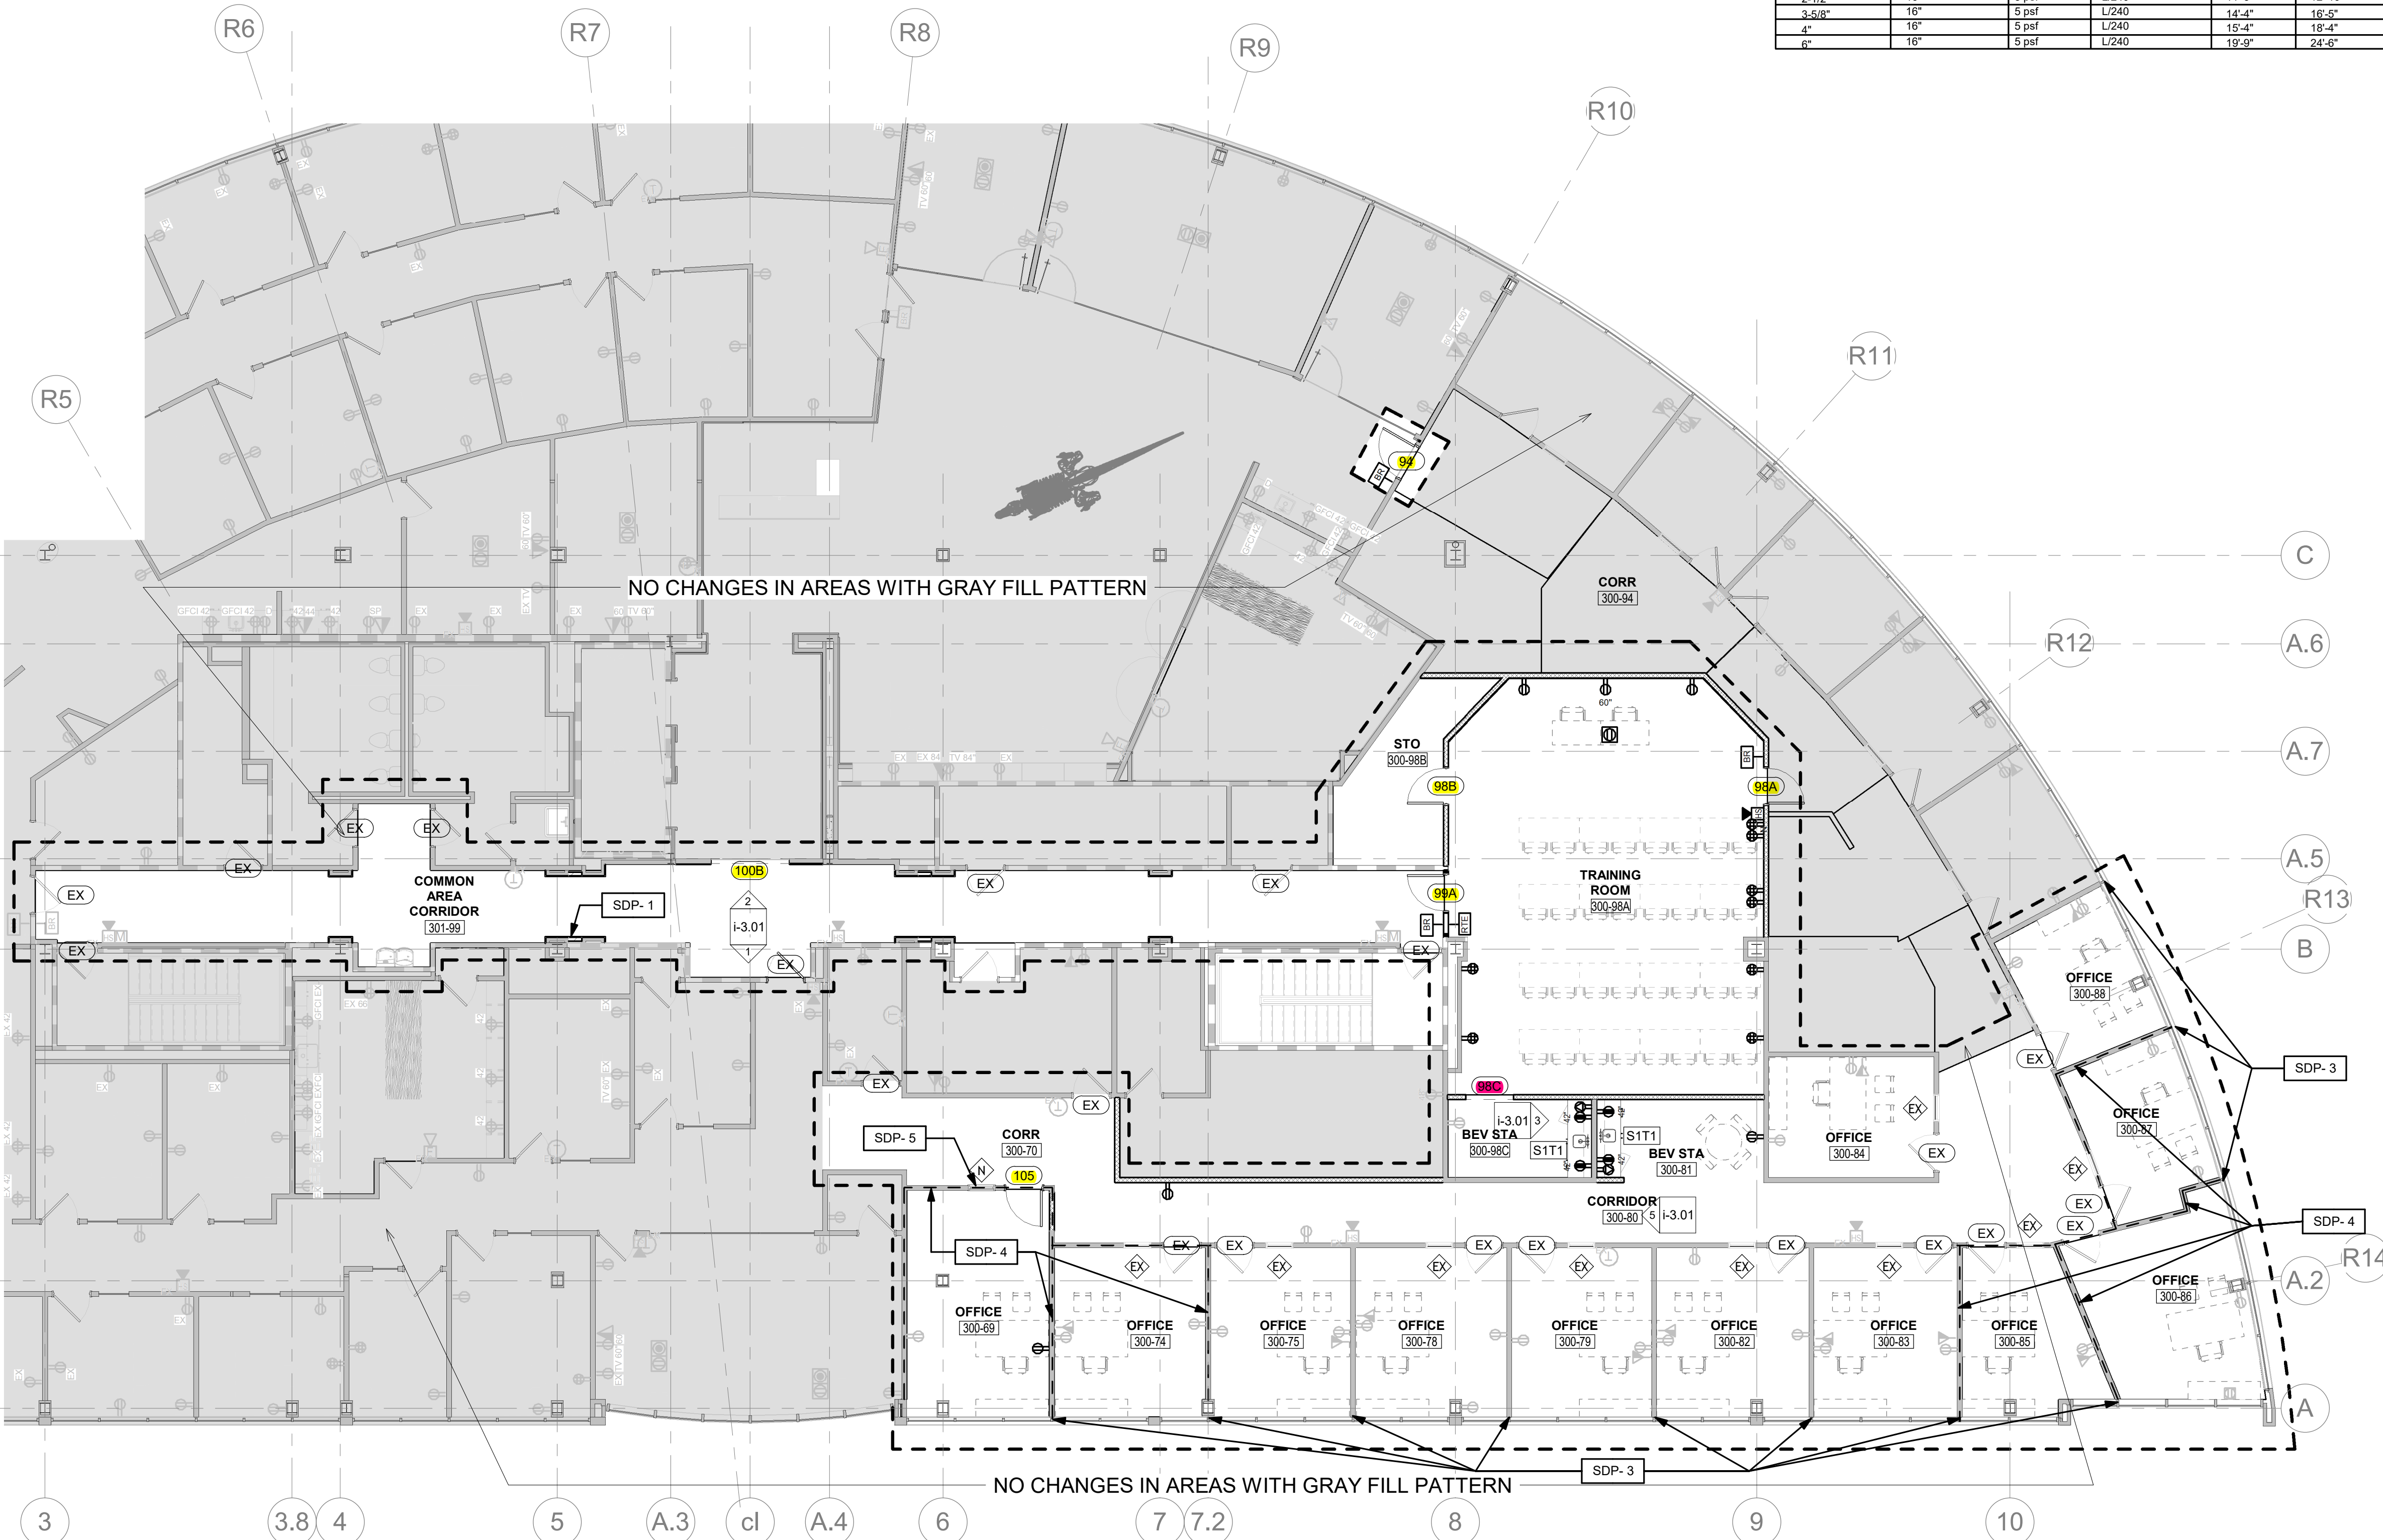
SCOPE OF WORK

Note: Contractor Verify Stud Height and Gauge. DEFLECTION NOT TO EXCEED L/240

- A** Partition Type B - (Partition)
Metal studs at 16" o.c. from slab to underside of ceiling grid, unless otherwise noted, with one layer 5/8" GWB each finished side. Provide control joints as recommended by USG. Tape and finish as required.
- B** Partition Type B - (Furred Out Partition)
Metal studs at 16" o.c. from slab to 6" above ceiling grid, unless otherwise noted, with one layer 5/8" GWB on finished side only to 6" above ceiling. Tape and finish as required.
- C** Partition Type C - (Sound Partition)
Metal studs at 16" o.c. from slab to underside of ceiling grid, unless noted otherwise, with one layer 5/8" GWB each face. Provide 5" sound attenuating batts between studs. Provide control joints as recommended by USG. Seal top and bottom with two continuous beads of acoustical sealant. Seal all openings. Tape and finish as required.
- D** Partition Type D - (Low Partition)
Metal studs at 16" o.c. from slab up to 34 1/2" above finish floor, unless otherwise noted, with one layer 5/8" GWB each face. Tape and finish as required.

INTERIOR FRAMING LIMITING HEIGHTS

STUD DEPTH	STUD SPACING	DESIGN LIMIT	DEFLECTION LIMIT	25 GAUGE	20 GAUGE
2-1/2"	16"	5 psf	L/240	11'-3"	12'-10"
3-5/8"	16"	5 psf	L/240	14'-4"	16'-6"
4"	16"	5 psf	L/240	15'-4"	18'-4"
6"	16"	5 psf	L/240	19'-9"	24'-6"



SYMBOLS AND DEVICES PLAN

1
1-121
1/8" = 1'-0"POOLE HUFFMAN - OFFICE
RENOVATION - PHASE IIA1990 Lakeside Parkway
Suite 300
Tucker, GA

POOLE HUFFMAN

Date
07/15/2026Description
PRICING SET

No.

SYMBOLS AND
DEVICES PLANS AND
NOTESPROJECT NO.
24930.00

SHEET NO.

i-1.21

All drawings and written materials represented on this sheet constitute the copyrighted work, and are the sole property of Studio Plaid, LLC. None of the drawings or written materials appearing within may be incorporated into another work for Studio Plaid, LLC without the written consent of Studio Plaid, LLC.