



DOOR SCHEDULE PH IIB								
DOOR NUMBER	DOOR TYPE	WIDTH	HEIGHT	DOOR MATERIAL	FRAME		HARDWARE SET	Comments
					FRAME TYPE	FRAME MATERIAL		
71	A	3'-0"	8'-4"	SCWD	EX	EX	EX	SALVAGED DOOR FRAME AND HARDWARE IN RELOCATED LOCATION
72	A	3'-0"	8'-4"	SCWD	EX	EX	EX	SALVAGED DOOR FRAME AND HARDWARE IN RELOCATED LOCATION
73	A	3'-0"	8'-4"	SCWD	EX	EX	EX	SALVAGED DOOR FRAME AND HARDWARE IN RELOCATED LOCATION
76	A	3'-0"	8'-4"	SCWD	EX	EX	EX	SALVAGED DOOR FRAME AND HARDWARE IN RELOCATED LOCATION
77	A	3'-0"	8'-4"	SCWD	EX	EX	EX	SALVAGED DOOR FRAME AND HARDWARE IN RELOCATED LOCATION
90	A	3'-0"	8'-4"	SCWD	KD	HM	SET 6	
97	A	3'-0"	8'-4"	SCWD	KD	HM	SET 6	

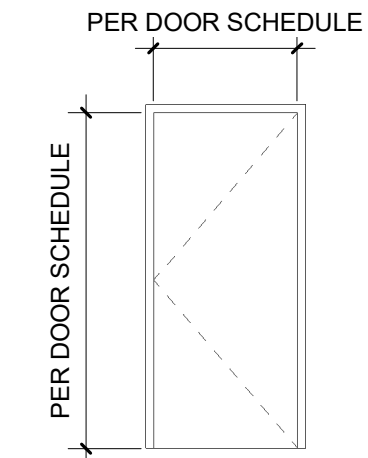

A
SOLID CORE WD DOOR
WITH HM FRAME

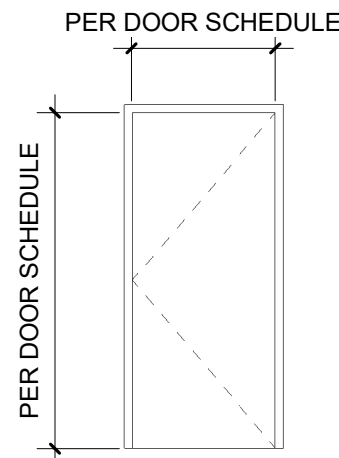

B
EXISTING RELOCATED
RATED SOLID CORE WD
DOOR WITH RATED HM
FRAME

TYPICAL DOOR HARDWARE LEGEND		
DOOR HARDWARE SPECIFICATIONS	DOOR HARDWARE SETS	
Note: All hardware finishes to be US32D or US36D unless noted otherwise Butts – Ives 5PB1 BB Butts Ives 5BB1 Offset Pivot Hinges - Dorma Pure Series Overhead Closers – LCN 4040 Flush Edge Bolts – Ives FB 358 Manual Flush Bolt Dust Proof Strikes – Ives DP2 Door Push/Pull - glass door - Rockwell SFSLP48MBL (48") - Matte Black Door Pulls - solid door – Ives 8300 plate with 8303 pull (4" x 16") Door Push Plate – Ives 8200 (4" x 16") Kick Plate – Ives 8400 Series 12" high, 34" wide Mop Plate – Ives 8400 Series 6" high, 34" wide Magnetic Lockset - Tenant's Vendor Badge Reader – Tenant's Vendor Request to Exit Sensor – Tenant's Vendor Request to Exit Button – Tenant's Vendor Power Supply – Tenant's Vendor Passage Set / Lockset / Dummy Trim – Schlage ND, Grade 1 Series with Athens lever design Silencers – Ives SR64 Floor Stop – Ives FS 436	SET 6 – Passage Set 1 1-1/2 Pair Butts 1 Passage set 1 Floor Stop 3 Silencers SET 8 – Rated Door with Card Access 1 2 Pair BB Butts 1 Overhead Closer 1 Entrance Function Lockset 1 Magnetic Lock 1 Badge Reader 1 Request to Exit Sensor 1 Request to Exit Button 1 Power Supply 3 Silencers SET 9 – Door with Card Access 1 2 Pair BB Butts 1 Overhead Closer 1 Passage Set 1 Magnetic Lock 1 Badge Reader 1 Request to Exit Sensor 1 Request to Exit Button 1 Power Supply 3 Silencers	

POOLE HUFFMAN - OFFICE
RENOVATION - PHASE IIB

1990 Lakeside Parkway
Suite 300
Tucker, GA

POOLE HUFFMAN

No.	Description	Date
	PRICING SET	07/15/2026

SCHEDULES AND
DETAILS

All drawings and written materials represented on this sheet constitute the copyrighted work, and are the sole property of Studio Plaid, LLC. None of the drawings or written materials appearing within may be incorporated into another work for Studio Plaid, LLC without the written consent of Studio Plaid, LLC.

PROJECT NO.
24930.00

SHEET NO.
i-6.01