



C:\Users\Shannon\Documents\2025-2026\31-Central Building Alteration - 2026.cdw-26_Shannon\31-CD-1.rvt 3/10/2025 3:54:49 PM

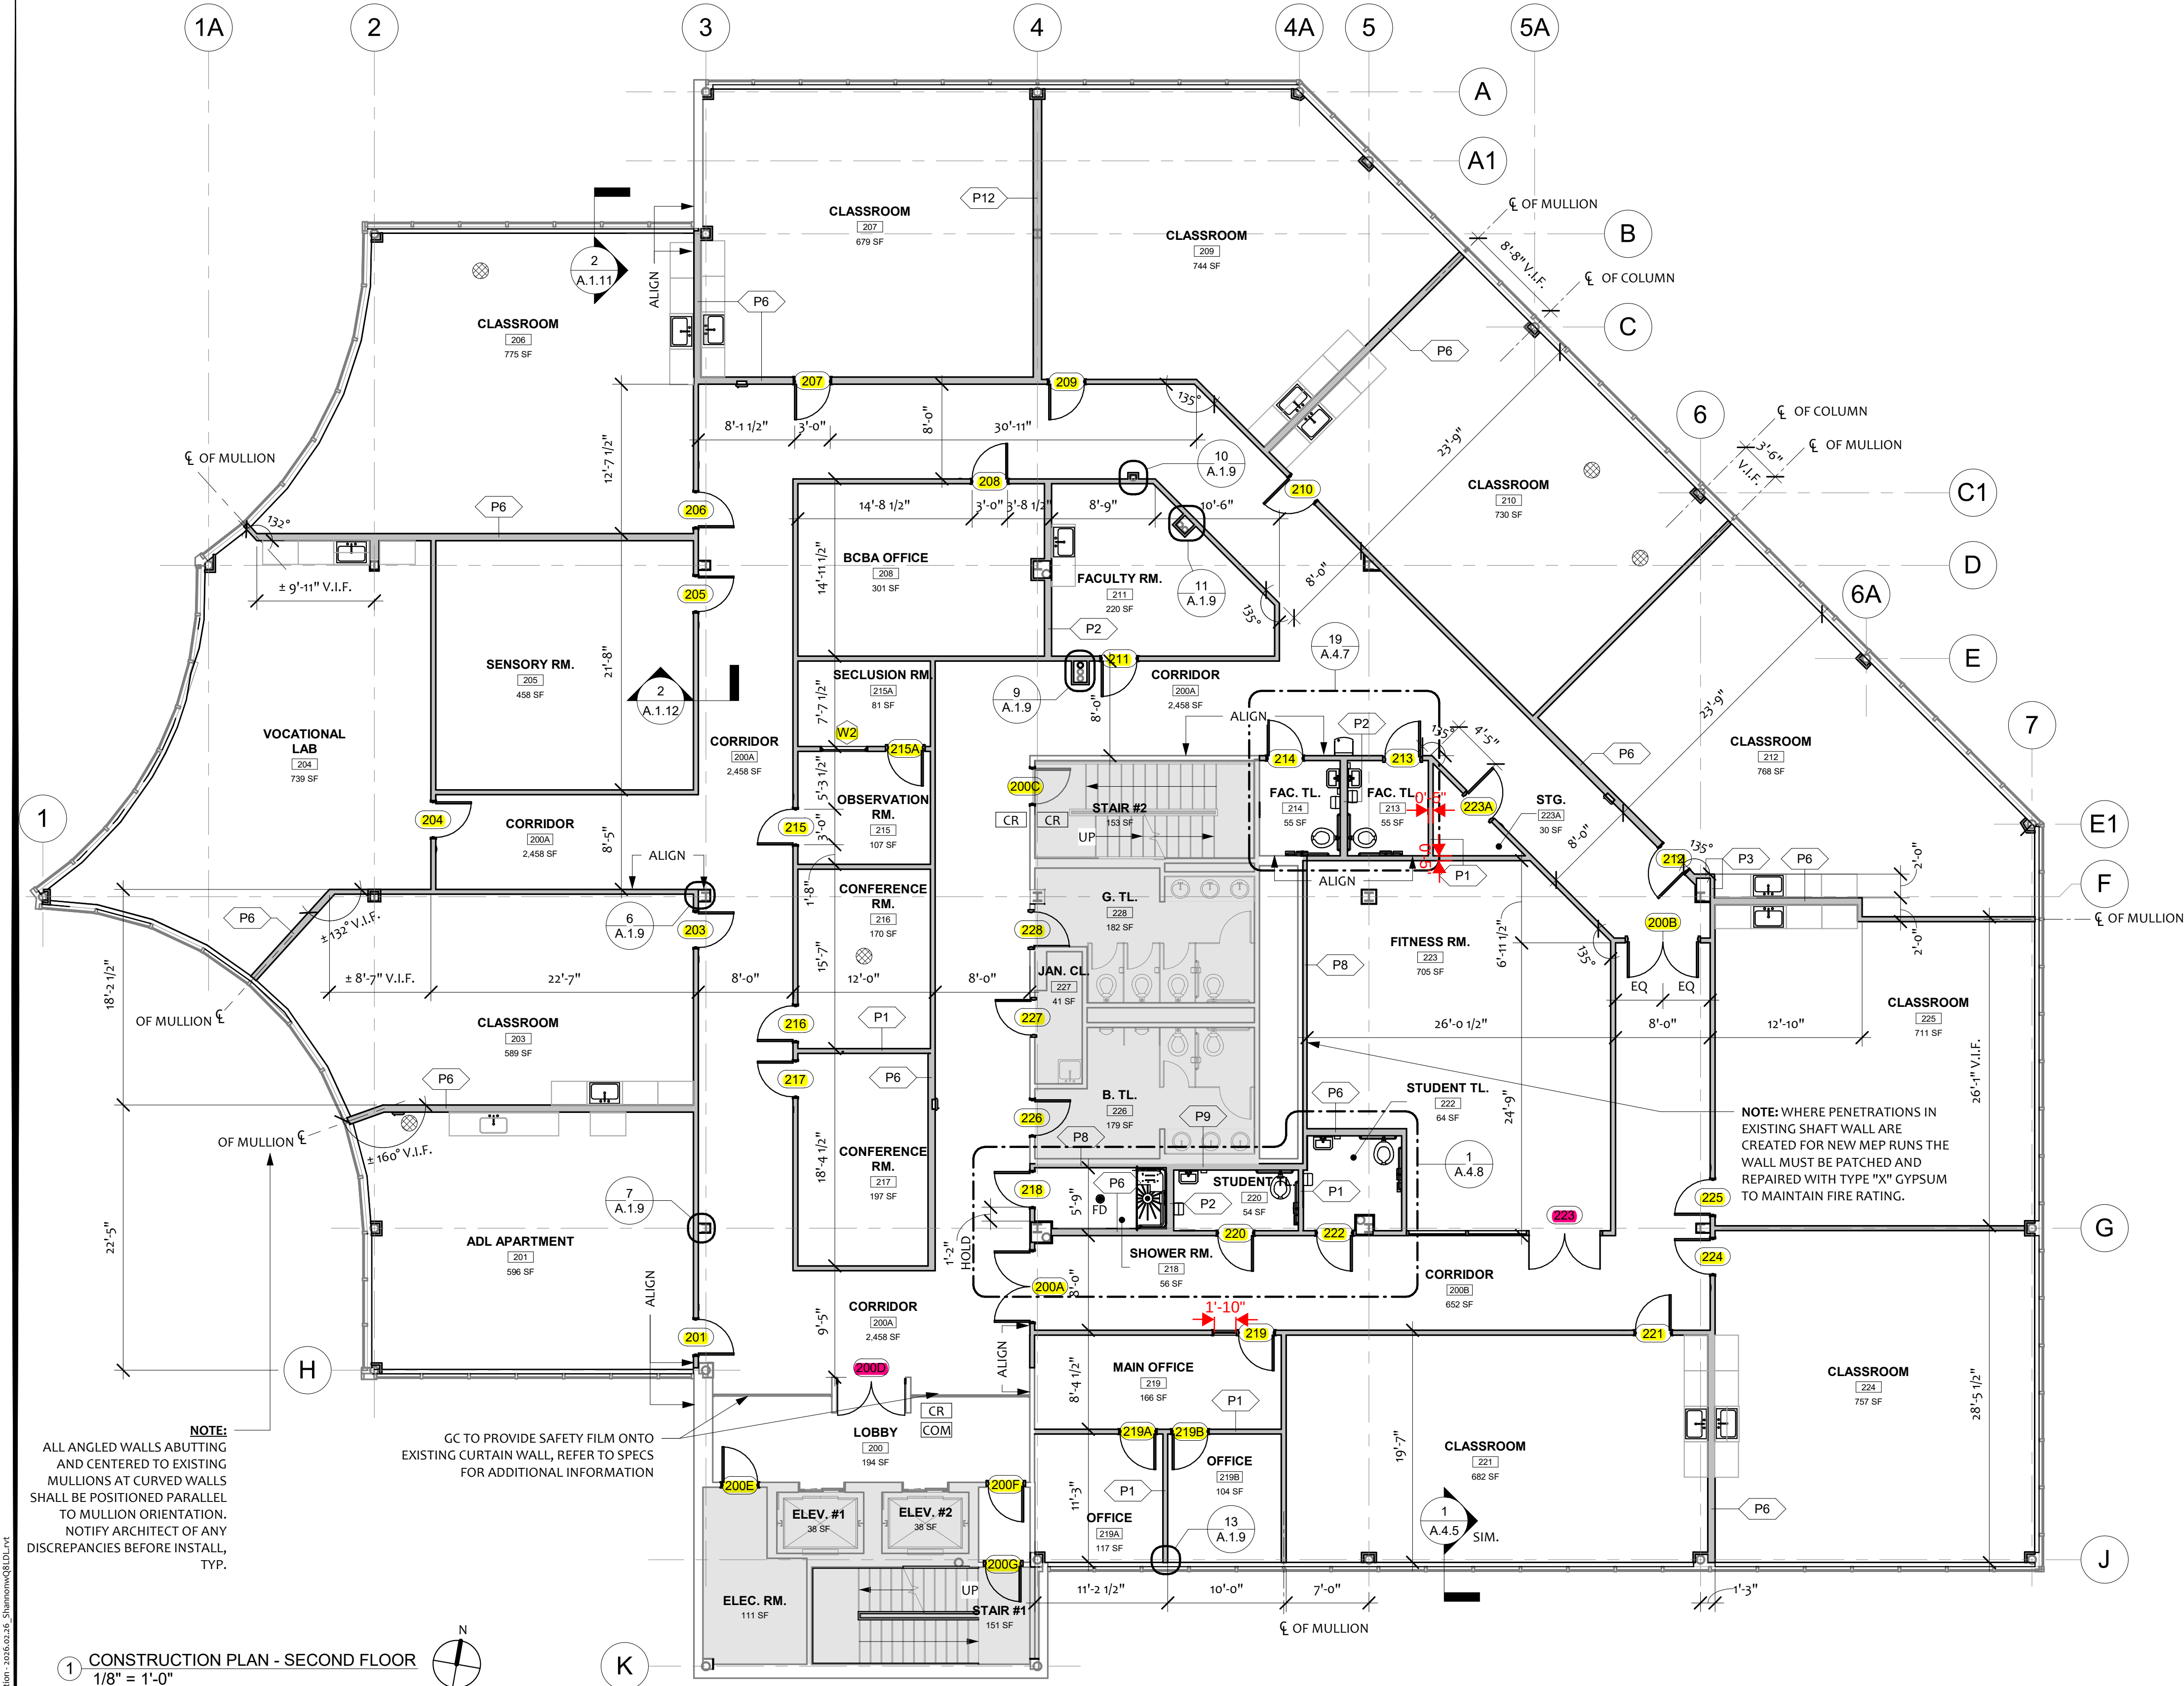

1 CONSTRUCTION PLAN - SECOND FLOOR
1/8" = 1'-0"

NOTE: REFER TO INTERIOR ELEVATIONS FOR
HEIGHTS OF ELECTRICAL OUTLETS, TYP.

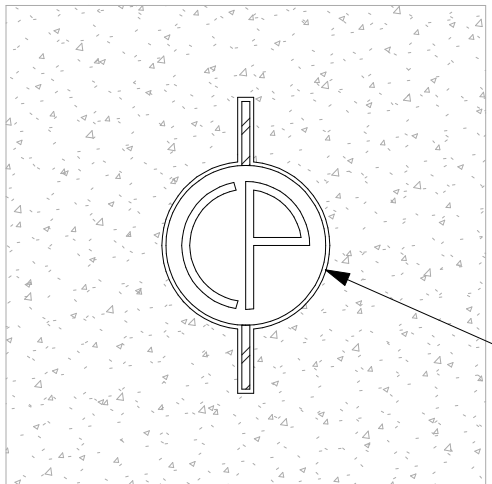

2 TYPICAL CORE DRILL INFILL DETAIL
1/2" = 1'-0"

NOTE: ALL EXISTING CORE DRILL
LOCATIONS TO BE INFILLED WITH
CORPLUG, OR APPROVED EQUAL,
FOLLOWING MANUF INSTALL
INSTRUCTIONS FOR COMPLETE
ASSEMBLY, TYP.

SEALANT AS SPECIFIED BY MANUF.

GENERAL NEW WORK NOTES

- WHERE INSTALLING WALL CONSTRUCTION, MATCH EXISTING CONSTRUCTION TYPE AND SIZE OF THE ADJACENT CONSTRUCTION, IF EXISTING MATERIALS CANNOT BE MATCHED COMPLETELY, COORDINATE WITH ARCHITECT ON APPROPRIATE ACTION.
- CONTRACTOR SHALL PATCH AND REPAIR EXISTING MASONRY WALLS, PLASTER WALLS, GYPSUM WALLS, FLOORING AND CEILINGS AS REQUIRED FOR ALL PLUMBING, MECHANICAL AND ELECTRICAL WORK.
- ALL FURNITURE IS UNDER A SEPARATE CONTRACT.
- PROVIDE FIRE STOPPING AT PENETRATIONS FROM CORRIDOR WALL INTO CLASSROOMS AND THRU NEW FIRE SEPARATION WALL.
- COORDINATE CASEWORK HOLD DIMENSIONS WITH CASEWORK SHOP DRAWINGS.
- PROVIDE NEW ITEMS AND PLUMBING FIXTURES AS SHOWN AND SPECIFIED, UNLESS STATED OTHERWISE.
- PREPARE EXISTING FLOOR TO RECEIVE NEW FLOOR FINISHES AS SPECIFIED ON FINISH SCHEDULE.
- PATCH ALL WALLS TO ORIGINAL CONDITION. PROVIDE NEW WALL PAINT AS SELECTED BY DISTRICT / ARCHITECT.
- ANY DAMAGE TO EXISTING FINISHES, INCLUDING CEILINGS, WALLS, OR FLOORING MUST BE REPAIRED TO THEIR ORIGINAL CONDITION. GC TO VERIFY ALL DIMENSIONS AGAINST EXISTING BUILDING CONDITIONS, ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.
- CONTRACTOR IS RESPONSIBLE FOR FLASH PATCHING/ LEVELING OF FLOOR PRIOR TO INSTALLATION OF NEW FINISH FLOORING.
- CONTRACTOR TO COORDINATE THE LOCATION OF POWER AND DATA FOR EACH ROOM WITH OWNER.
- ALL WALLS, TRIM, AND CEILINGS TO BE SANDED WHERE NECESSARY, PATCHED, PRIMED, AND PAINTED. PAINT TO BE SELECTED BY OWNER IN ACCORDANCE WITH OWNERS EXISTING STANDARDS.
- REFER TO PLUMBING DRAWINGS FOR FIXTURE TYPES.
- PATCH, PRIME, AND PREPARE FOR NEW FINISHES ALL SURFACES WHERE EXISTING WALLS, CABINETS, MECHANICAL EQUIPMENT, ETC. HAVE BEEN REMOVED.
- CONTRACTOR SHALL PROVIDE AND INSTALL WOOD BLOCKING WITHIN ALL WALL ASSEMBLIES AT LOCATIONS DESIGNATED FOR CASEWORK, TOILET ACCESSORIES, VISUAL DISPLAY BOARDS, AND WALL MOUNTED EQUIPMENT AS REQUIRED.
- ALL WALL PARTITIONS ARE TYPE P5 UNLESS NOTED/TAGGED OTHERWISE.
- ALL DOORS THAT ARE ADJACENT TO A PERPENDICULAR WALL WILL HAVE THE HINGE SIDE OF THE DOOR OPENING 6" MINIMUM FROM THAT PERPENDICULAR WALL.
- GC TO INSTALL A NEW SOLID SURFACE SILL ALONG THE INTERIOR BUILDING PERIMETER AT ALL GLAZING LOCATIONS THROUGHOUT THE ENTIRE FIRST AND SECOND FLOORS, AND AT THE INDICATED AREAS ON THE THIRD FLOOR. REFER TO THE FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
- ALL EXISTING FLOOR CORE DRILLS THAT ARE NO LONGER REQUIRED SHALL BE INFILLED IN ACCORDANCE WITH DETAIL 2/A.1.5.
- ALL ROUGH AND EXPOSED SURFACES FROM DEMOLISHED WALLS AND CEILING SHALL BE PATCHED AND FINISHED TO MATCH ADJACENT EXTERIOR SURFACE UNLESS OTHERWISE NOTED.

CONSTRUCTION LEGEND

	SCOPE OF WORK ITEM TYPICAL THROUGHOUT ENTIRE ROOM		DOOR TAG
	SCOPE OF WORK ITEM AT A SPECIFIC LOCATION		WINDOW TAG
	EXISTING WALLS TO REMAIN		PARTITION TAG
	EXISTING RATED WALL TO REMAIN		AREA NOT IN CONTRACT
	NEW PARTITIONS. REFER TO PARTITION TYPES		FIRE EXTINGUISHER CABINET
	NEW 1 HR RATED WALL		CARD READER
	EXISTING DOOR TO REMAIN		INTERCOM SYSTEM
			APPROXIMATE CORE DRILLS LOCATIONS TO BE INFILLED, REFER TO 2/A1.5.

INTERIOR ALTERATIONS
FOR
**UNION COUNTY EDUCATIONAL SERVICES
COMMISSION**
AT
WESTLAKE / UCESC BOE
53 CARDINAL DR., WESTFIELD, NEW JERSEY 07090

Consulting Engineer's Seal:

NEW WORK PLAN - SECOND FLOOR

No.	DATE:	COMMENTS:
	3/10/2026	ISSUE FOR BID
DATE:	SOLUTION No.	
3/10/2026	25.138B	
SCALE:	As indicated	
DRAWN BY:	SW, TB	DRAWING No.
CHECKED BY:	YO	A.1.5